


SOCKET & RELAY MODULES

14FF-2Z-A1 PCB Socket



Approved by:

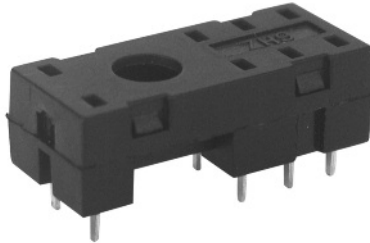



Socket Characteristics

Ambient Temperature	-40°C to +70°C
Voltage Rating	250VAC
Current Rating	10A per pole
DIN Protection rating	IP20 (DIN40050)
Construction material	PTB VO (UL)
Spring Contact material	QSn6.5-0.1
Steel Retainer	HI supplied with socket H1 = 140FF-KRC-2
White plastic tag	Non available
Relay Applications	HF115F series, Relay-height 15.7mm HF140FF series, Relay-height 25.5mm
Dielectric Strength (min)	2000VAC

Dimensions, PCB Layout and Wiring Diagram


(Units in mm)

Outline Dimensions

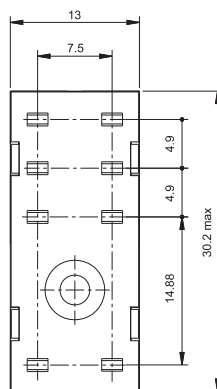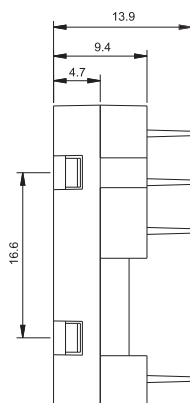


(Top View)

Wiring Diagram

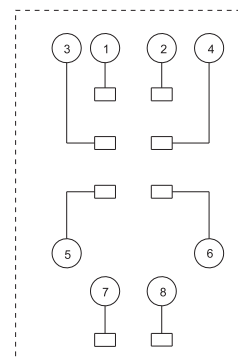

(Top View)

Retainer Dimensions

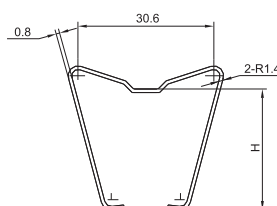

Three types of retainer height (H) :

H1=17.2mm (for -1 type)

H2=27.2mm (for -2 type)