

SOCKET & RELAY MODULES

14FF-2Z-C2 DIN Rail Socket



Approved by:

c US

CE


Socket Characteristics

Ambient Temperature	-40°C to +70°C
Voltage Rating	250VAC
Current Rating	12A per pole
DIN Protection rating	IP20 (DIN40050)
Construction material	PA66+GF VO (UL)
Spring Contact material	QSn6.5-0.1
Plastic Retainer	H1 = 14F-ERC-1 Supplied with socket H2 = 14F-ERC-2 H3 = 14F-ERC-3
White plastic tag	14F-Marking tag Supplied with socket
Modules	HFAA to HFHU available
Terminal Torque	0.6Nm
Wire strip length	7mm
Relay Applications	HF115F series. Relay-height 15.7mm HF141FH series. Relay-height 20.6mm HF14FF series. Relay-height 25.5mm


Dimensions, Socket Layout and Wiring Diagram

(Units in mm)


Outline Dimensions

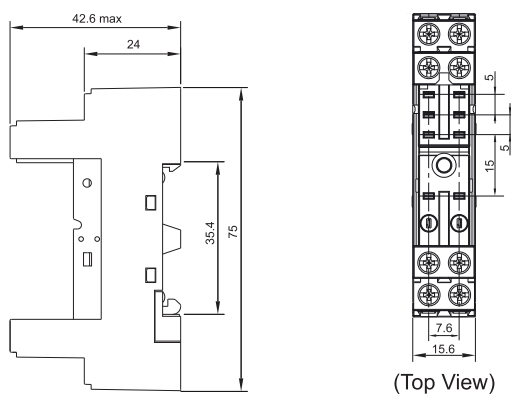

Wiring Diagram

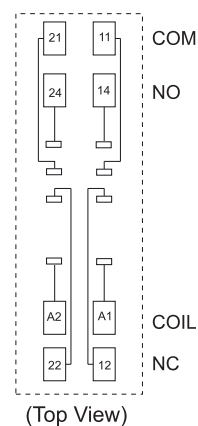

Retainer Dimensions

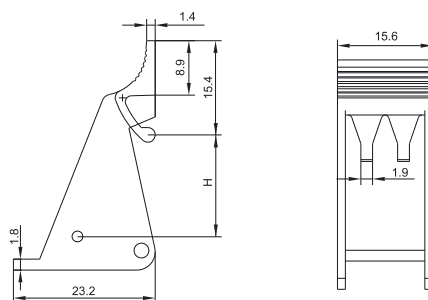

Three types of H:

H1=16mm (for -1 type)

H2=21mm (for -2 type)

H3=26mm (for -3 type)