

1 & 2 Pole DIN Mount Relay Sockets

D Series Relay



- For D1 & D2 plug in power relay
- 35mm DIN rail mount
- Ejector clips available
- CE & UKCA approved

Socket Characteristics

Ambient Temperature	-40°C to +70°C
Voltage Rating	250VAC
Current Rating	10A Per Pole
DIN Protection Rating	IP20
Construction Material	PA66+GF V0 (UL)
Terminal Torque	0.6N.m
Wire Strip Length	7mm
Relay Application	D1 & D2
Dielectric Strength	2000VAC

Base Part Number	Description
157FF-1Z-C3	1 Pole 5 Pin DIN Socket for D1 Relay
157FF-2Z-C3	2 Pole 8 Pin DIN Socket for D2 Relay
157F-ERC	Plastic Ejector Clip for D1 & D2 Relay
14F-MARKING TAG	Marking Tag for 157FF Sockets

157FF-1Z-C3

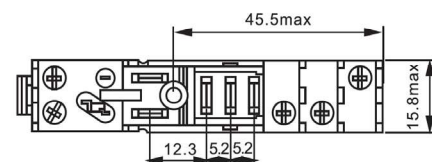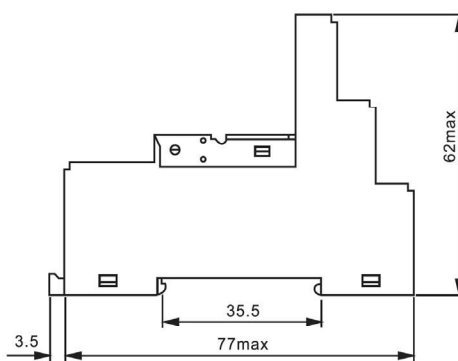

157FF-2Z-C3

