





> BA15D <
> LED BULB COMPATIBLE <

B A R G Y N **G B**
MODULE RING



DRAWINGS, DIMENSIONS AND WEIGHTS

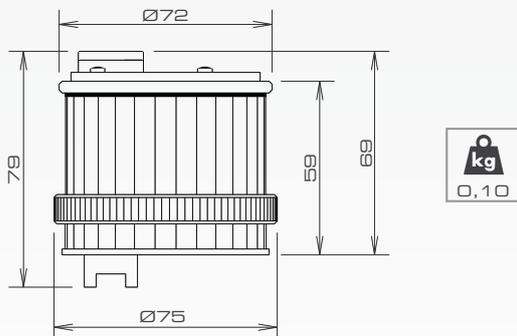

TWS STEADY/FLASHING | PART NO

See page 19, section "TWS STEADY/FLASHING"

TWS STEADY/FLASHING

Light module with traditional Ba15d lamp holder. Allows the use of traditional 5W incandescent filament bulbs as well as low consumption LED bulbs.

Available in STEADY and FLASHING version, this module is the ideal choice when economic efficiency is the priority and where a future upgrade to LED version (bulbs or integrated module) is foreseen.

KEY CHARACTERISTICS

LIGHT EFFECTS

TWS STEADY | STEADY LIGHT
TWS FLASHING | FLASHING LIGHT

VOLTAGES

TWS STEADY | 12/240V ACDC +/-10%
TWS FLASHING | 12/48V DC, 24/240V AC +/-10%

PROTECTION GRADE

IP66, UL TYPE 4X, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP66/TYPER 4X protection grade guaranteed by a double polyurethane gasket installed on every module

OPTICAL FEATURES

The vertically lined lens allows a perfect light distribution over 360°

CERTIFICATIONS

