



**TWS HD SS**



**AISI 316 SST**

BODY



TUBE



Assembly example  
with 3 TWS S  
allCLEAR modules

> **STAINLESS STEEL** <  
> **IP69K** <

**TWS HD AL**



BODY



TUBE



Assembly example  
with 3 TWS LED  
PROXIMITY modules

> **ANODIZED ALUMINIUM** <  
> **IP69K** <

**TWS HD I PART NO**

See page 19, section "TWS HD"

## TWS HD SS **new**

IP69K stainless steel enclosure engineered for the TWS range.

IP69K grade protects stacklight from high temperature and pressure dust/water, making this product ideal in all situations where machineries need to be accurately sanitized.

Particularly in the food industry, where hygiene is a must, machinery needs to be able to withstand wash-down (high pressure/high temperature washing) procedures.

IP69K is the highest protection grade available.

TWS HD enclosure can be installed on a threaded pole, on flat surfaces or on lateral (wall) surfaces using the accessories range.

## TWS HD AL **new**

Heavy Duty anodized aluminum enclosure engineered for the TWS range.

Allows protection from high pressure and temperature dust/water (protection grade IP69K).

### KEY CHARACTERISTICS

#### PROTECTION GRADE


TUV SUD IP69K

#### MECHANICAL FEATURES

**SS** | Polished stainless steel (AISI 316) body. UV resistant polycarbonate tube. A Goretex valve installed at the bottom of the enclosure allows a condense-free environment

**AL** | Black anodized aluminum body. UV resistant polycarbonate tube. A Goretex valve installed at the bottom of the enclosure allows a condense-free environment

### DRAWINGS, DIMENSIONS AND WEIGHTS

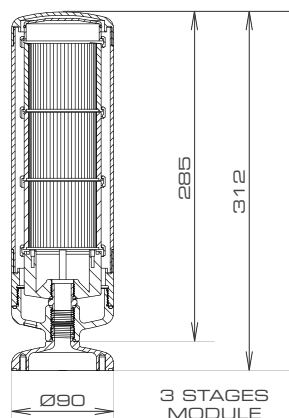

**SS**



**AL**

### CERTIFICATIONS

