




- > MULTIFUNCTION <
- > SUPERBRIGHT <
- > LOW CONSUMPTION <
- > RESISTANCE TO VIBRATIONS <



PC	-30 +50 C°	IP65	ON	CLASS 2	SELF EXTINGUISHING
LED SMD	DIFFUSED	CPM 2F 72 ±10	CPM 3F 71 ±10	CPM 5F 70 ±10	FPM RANDOM new

DRAWINGS, DIMENSIONS AND WEIGHTS



ELYPS LM X MULTI | PART NO

	32351
	32352
	32353
	32354
	32355
	32356

ELYPS LM X MULTI LIGHT MODULE

Integrated superbright LED multifunctional light module engineered to naturally substitute traditional Xenon discharge lamps modules.

Enriched by 4 light effects: double flash, triple flash, stroboscopic and random. The random effect consists in an uneven flashing pattern, augmenting the ability of catching attention.

ELYPS LM X MULTI offers versatility and good optical performance as well as virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life.

* At normal conditions, without vibrations and heavy temperature changes

KEY CHARACTERISTICS

LIGHT EFFECTS

2x FLASH | 3x FLASH | 5x FLASH | RANDOM
Selectable via dip-switch

VOLTAGES

According to selected Wiring Module (WM)
With WM LT and WM LT MULTI: 12/24V ACDC
With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE

IP65, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

OPTICAL FEATURES

2x SuperBright LEDs (1 per side). The vertically lined lens allows a perfect light distribution over 360°

CERTIFICATIONS




ELYPS


everybody loves beauty

PHILOSOPHIES


AM ACOUSTIC MODULE

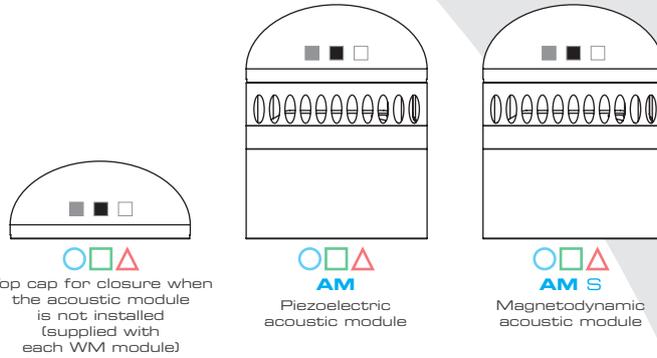


LM LIGHT MODULE

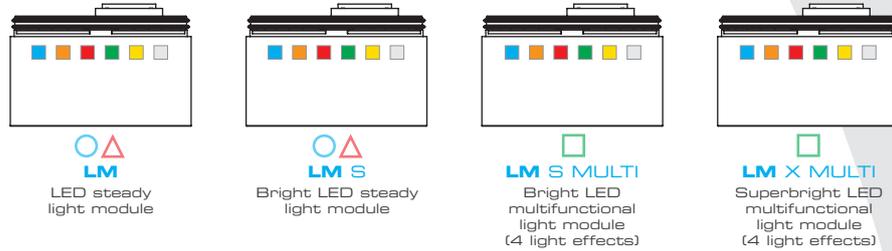

WM WIRING MODULE

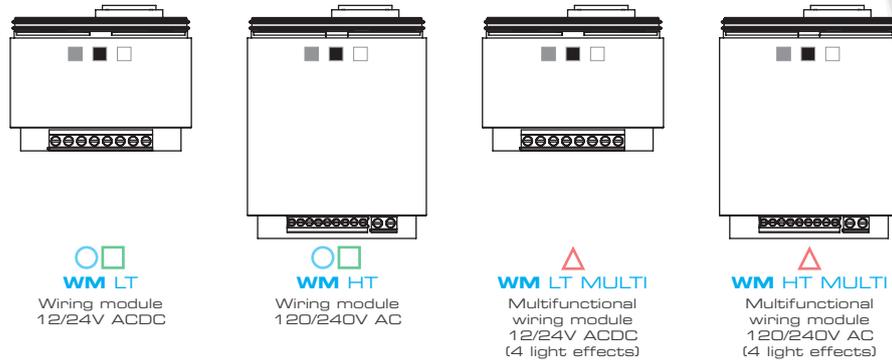

MB MOUNTING BASE

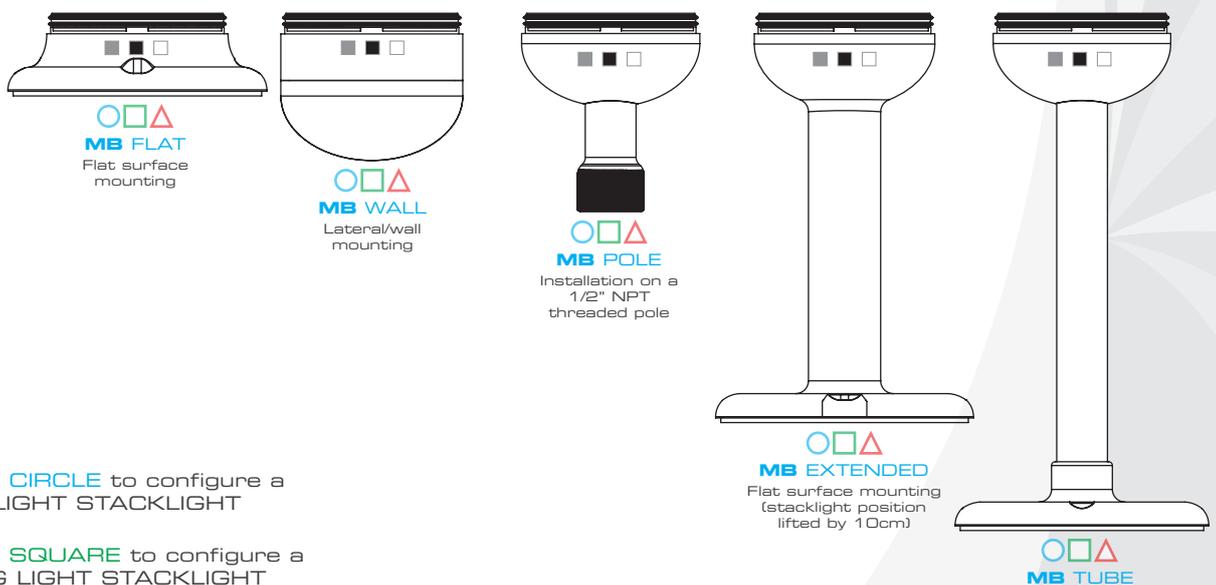

-  Follow the **CIRCLE** to configure a **STEADY LIGHT STACKLIGHT**
-  Follow the **SQUARE** to configure a **FLASHING LIGHT STACKLIGHT**
-  Follow the **TRIANGLE** to configure a **STACKLIGHT WITH FLASHING CONTROLS IN THE BASE**