





- > MULTIFUNCTION <
- > HIGH BRIGHTNESS <
- > LOW CONSUMPTION <
- > RESISTANCE TO VIBRATIONS <

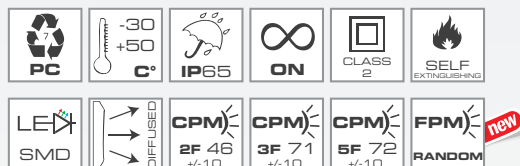

DRAWINGS, DIMENSIONS AND WEIGHTS



ELYP S MULTI | PART NO

allCOLOR		allCLEAR
	32391	32401
	32392	32402
	32393	32403
	32394	32404
	32395	32405
	32396	32406

ELYP S MULTI LIGHT MODULE

Integrated bright LED multifunctional light module.

Enriched by 4 light effects: double flash, triple flash, stroboscopic and random. The random effect consists in an uneven flashing pattern, augmenting the ability of catching attention.

ELYP S MULTI offers versatility and good optical performance as well as virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life.

Available with allCOLOR and allCLEAR lens, ELYPS LM S MULTI is the right choice for a high performance multifunctional stacklight module.

* At normal conditions, without vibrations and heavy temperature changes

KEY CHARACTERISTICS

LIGHT EFFECTS

2x FLASH | 3x FLASH | 5x FLASH | RANDOM
Selectable via dip-switch

VOLTAGES

According to selected Wiring Module (WM)
With WM LT and WM LT MULTI: 12/24V ACDC
With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE

IP65, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

OPTICAL FEATURES

6x Bright LEDs (3 per side). The vertically lined lens allows a perfect light distribution over 360°. Available with 2 different lens types, according to the final application

allCOLOR

STANDARD USE

Colored lens with colored light source.
The use of a colored lens with the same-color light source allows optimization of the emission frequency producing a rich intense light output

allCLEAR

USE IN VERY BRIGHT ENVIRONMENTS

Clear lens with colored light source.
In very bright environments it is possible that the ambient brightness lights up the module when it is switched OFF creating problems in distinguishing between the ON and OFF state of the stacklight (phantom effect). The clear lens module allows clear distinction between the ON and OFF status of the stacklight



CERTIFICATIONS




ELYPS

everybody loves beauty

PHILOSOPHIES

AM ACOUSTIC MODULE

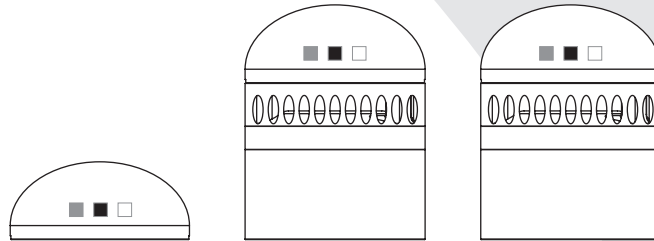


Top cap for closure when the acoustic module is not installed (supplied with each WM module)

Piezoelectric acoustic module

Magnetodynamic acoustic module

LM LIGHT MODULE

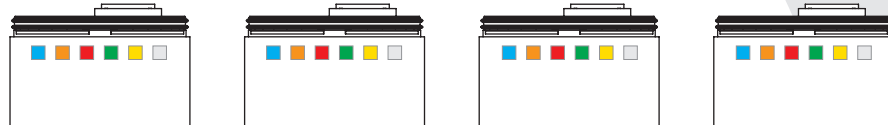


LED steady light module

Bright LED steady light module

Bright LED multifunctional light module (4 light effects)

Superbright LED multifunctional light module (4 light effects)

WM WIRING MODULE

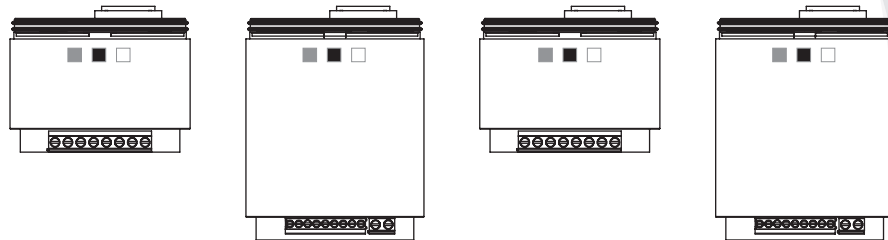


Wiring module 12/24V ACDC

Wiring module 120/240V AC

Multifunctional wiring module 12/24V ACDC (4 light effects)

Multifunctional wiring module 120/240V AC (4 light effects)

MB MOUNTING BASE

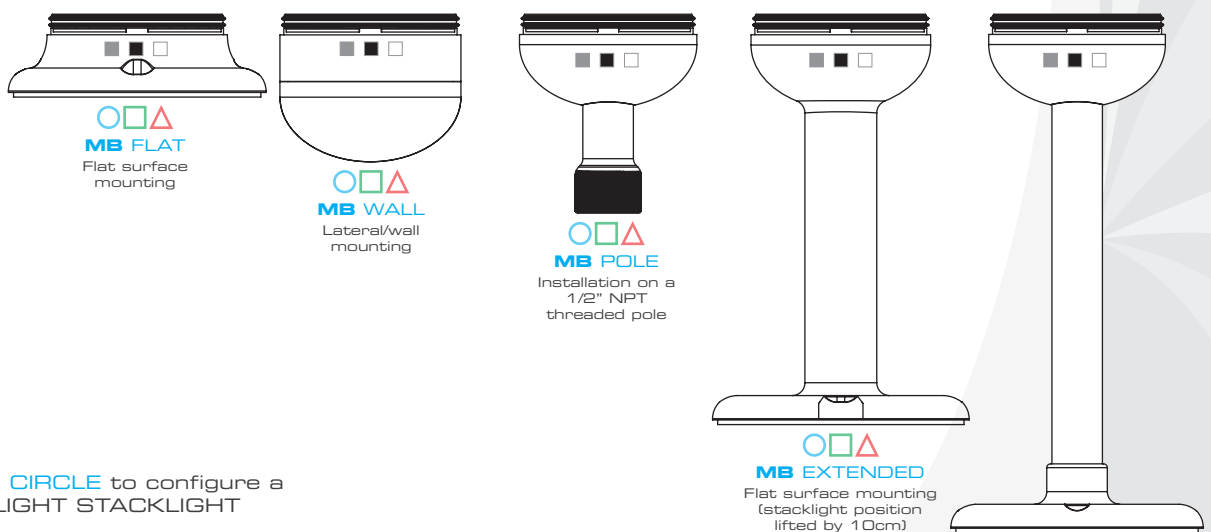

Flat surface mounting

Lateral/wall mounting

Installation on a 1/2" NPT threaded pole

Flat surface mounting (stacklight position lifted by 10cm)

Flat surface mounting, use in conjunction with a Stainless Steel extension tube (lengths available 10, 20, 30, 40cm)

- Follow the **CIRCLE** to configure a **STEADY LIGHT STACKLIGHT**
- Follow the **SQUARE** to configure a **FLASHING LIGHT STACKLIGHT**
- Follow the **TRIANGLE** to configure a **STACKLIGHT WITH FLASHING CONTROLS IN THE BASE**