



BIP 81



> 72 dB max <



BIP 81 | PART NO

	GY	BK
12V ACDC	42300	33010
24V ACDC	42301	33011
48V ACDC	42302	33015
110V DC	42303	33040
110V AC	42304	33012
240V DC	42307	33042
240V AC	42308	33014

BIP 81

Sounder with LED light engineered for panel mount applications.

Developed with acoustic piezoelectrical capsule, the device generates a characteristic intermittent sound.

KEY CHARACTERISTICS

NUMBER OF TONES

1 (Intermittent Sound)

VOLTAGES

12V ACDC, 24V ACDC, 48V ACDC, 110V DC, 110V AC, 240V DC, 240V AC +/-10%

PROTECTION GRADE

IP30

OPERATING TEMPERATURE

-30/+50 °C

MECHANICAL FEATURES

PC body

Flush mounting for square holes


ACOUSTIC FEATURES

Acoustic piezoelectrical capsule

Intermittent Sound

Frequency: 1800Hz

DRAWINGS, DIMENSIONS AND WEIGHTS

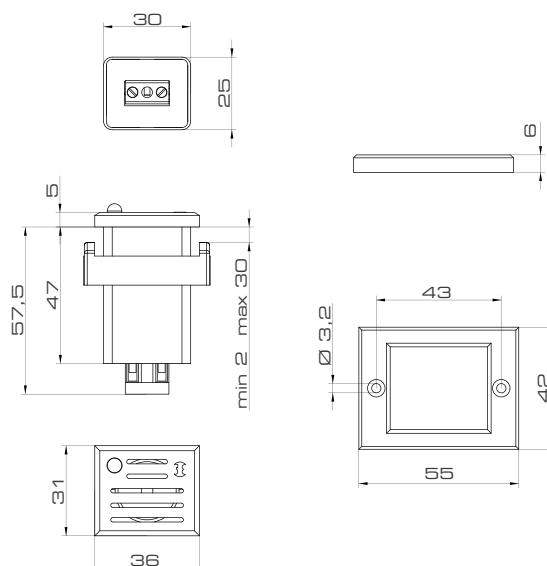

CERTIFICATIONS

