




BIP 84



> 80 dB max <

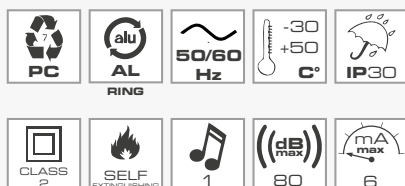

BIP 84 | PART NO

	GY	BK
12V ACDC	42345	33060
24V ACDC	42346	33061
48V ACDC	42347	33065
110V DC	42348	33067
110V AC	42349	33063
240V DC	42352	33069
240V AC	42353	33066

BIP 84

Sounder with LED light engineered for panel mount applications.

Developed with acoustic piezoelectrical capsule, the device generates a characteristic intermittent sound.

KEY CHARACTERISTICS

NUMBER OF TONES

1 (Intermittent Sound)

VOLTAGES

12V ACDC, 24V ACDC, 48V ACDC, 110V DC, 110V AC, 240V DC, 240V AC +/-10%

PROTECTION GRADE

IP30

OPERATING TEMPERATURE

-30/+50 °C

MECHANICAL FEATURES

PC body and aluminium lockring

Flush mounting (holes Ø30mm) through the lockring provided



ACOUSTIC FEATURES

Acoustic piezoelectrical capsule

Intermittent Sound

Frequency: 2200/3500Hz

DRAWINGS, DIMENSIONS AND WEIGHTS



CERTIFICATIONS

