




BIMF LED



> 85 dB max <



BIMF LED | PART NO

	GY	BK	RD
12/240V ACDC	38030	38031	38032

BIMF LED

Small size multifunctional sounder with LED light engineered for panel mount applications.

Developed with acoustic piezoelectrical capsule, the device generates a characteristic continuous or intermittent sound (slow or fast mode).

The luminous signalization can be steady (with continuous sound) or slow/fast flashing light (respectively with slow and fast intermittent sound).

KEY CHARACTERISTICS

NUMBER OF TONES

3 (Continuous Sound - Slow/Fast Intermittent Sound)

VOLTAGES

12/240V ACDC +/-10%

PROTECTION GRADE

IP55

OPERATING TEMPERATURE

-30/+50 °C

MECHANICAL FEATURES

ABS body, washer and lockring

Screw mounting or flush mounting through the lockring provided (Ø12mm). Adapter for holes Ø16mm - 22mm supplied with the product

ACOUSTIC FEATURES

Acoustic piezoelectrical capsule


Continuous Sound - Slow/Fast Intermittent Sound selectable via dip-switch

Frequency: 2500+/-500Hz

OPTICAL FEATURES

6 red LEDs producing a steady or slow/fast flashing light, respectively combined with continuous or intermittent sound

DRAWINGS, DIMENSIONS AND WEIGHTS

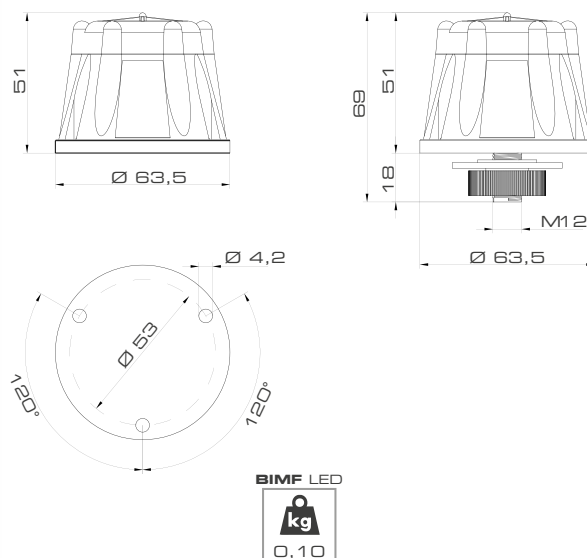

CERTIFICATIONS

