



SE 25/50 MS5



SE 25/51 MS5

> 116 dB max <  
> MULTI-TONE <



SE 25/50 SE 25/51

## SE 25/50 MS5 | PART NO

	GY
12/24V ACDC	50410
48V AC	50411
110V AC	50412
240V AC	50413

## SE 25/51 MS5 | PART NO

	GY
12/24V ACDC	50406
48V AC	50407
110V AC	50408
240V AC	50409

## SE 25 MS5

Electronic sirens engineered for industrial applications.

Developed with 25W magnetodynamic unit, these electronic sirens benefit from five different tones, selectable via dip-switch. These electronic sirens allow volume level (from min. to max.) and sound progression regulation (time required to reach the sound level set).

Ideal choice for industrial applications, from general-purpose signalization to warning of impending dangers.

Two types available (SE 25/50, SE 25/51) according to the desired sound output.

## KEY CHARACTERISTICS

### NUMBER OF TONES

5 (Continuous, Two-tone, Multi-tone, Modulated, Two-tone for Evacuation)

### VOLTAGES

12/24V ACDC, 48V AC, 110V AC, 240V AC +/-10%

### PROTECTION GRADE

IP43

### OPERATING TEMPERATURE

-30/+50 °C

## MECHANICAL FEATURES

ABS body and sound speaker

Easy installation by means of the integrated fixing bracket

## ACOUSTIC FEATURES

25W magnetodynamic unit. 5 tones selectable via dip-switch:

Continuous: 1000Hz


Two-tone: 600/700Hz

Multi-tone: 1000/1700Hz

Modulated: 1000/1700Hz

Two-tone for Evacuation: 440/560Hz

## DRAWINGS, DIMENSIONS AND WEIGHTS

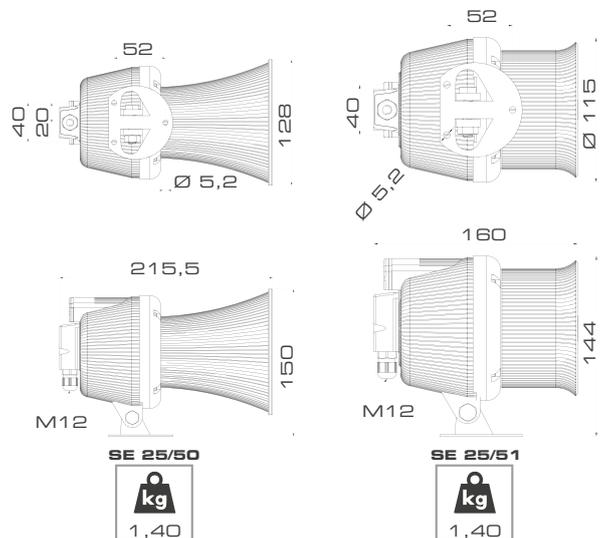

## CERTIFICATIONS

