




## DESCRIPTION

Male conduit fitting, suitable with smooth conduit, vacuum coated, and bare conduit.

Wide range available, including reduced connection diameters for junction boxes, equipped with standard knockouts.

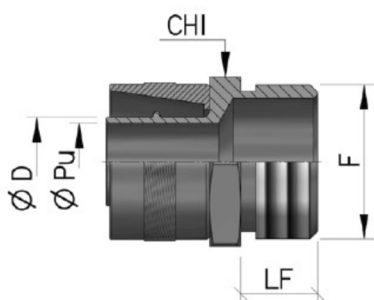

### Max IP degree of the system IP54

CODE	CONDUIT INTERNAL DIAMETER D mm	USEFUL PASSAGE Pu mm	WRENCH SIZE CHI mm	THREAD F	THREAD LENGHT LF mm
614-16M20	16	13,5	24	M20X1.5	10
614-21M25	21	18	30	M25X1.5	12
614-27M32	27	24	36	M32X1.5	13
614-35M40	35	32	50	M40X1.5	14
614-40M50	40	38	55	M50X1.5	14

## IP degree of the connection

Bare conduit

IP40

Vacuum coated

IP54

Smooth coated

IP54

