

EX 065 SCL



EX 065 SCT



SCL / SCT

|    |           |      |           |      |
|----|-----------|------|-----------|------|
| V  | 24        | 48   | 110       | 240  |
| A  | 8         | 6.75 | 1.9       | 1.35 |
| dB | 107 (SCL) |      | 106 (SCT) |      |
| Hz | 1000±100  |      |           |      |

|       |                         |            |
|-------|-------------------------|------------|
| IP 66 | On: 2 Min. Off: 30 Min. | °C -20 +50 |
|       | M25x1.5                 |            |

## SUPERCELERE SUPERCELEREST

Explosion-proof electromechanical sirens, larger in size compared to the MINICELERE range, specifically engineered and manufactured for installation in areas where a higher sound level is required. The SUPERCELERE range is a unique combination of precision and technology representing the 30 years experience that SIRENA has established in the electromechanical siren field.


Explosion-proof electromechanical sirens for use in Group II areas, Zones 1, 2, and 21, 22 explosive atmospheres.



**II 2GD Ex d e IIC T6 Ex tD A21 IP66  
T85 °C**


- Approval: **CESI 10 ATEX 038 X**
- Housing in copper-free aluminium alloy
- Polyester paint RAL 3020
- Voltages available:
  - 24V-48V-110V-240V ACDC
- Audibility: max. 107 dB(A)1m
- Protection: IP 66
- Maximum surface temperature: T6

SCL

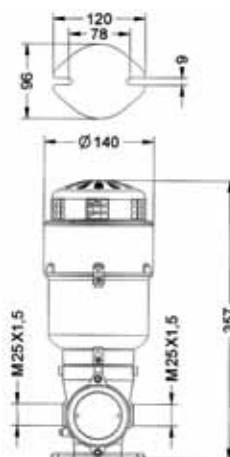

Kg: 4.10

SCT

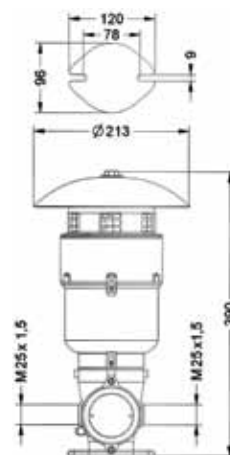

Kg: 4.43

| CODES      | 24V   | 48V   | 110V  | 240V  |
|------------|-------|-------|-------|-------|
| EX 065 SCL | 62244 | 62245 | 62246 | 62247 |
| EX 065 SCT | 62240 | 62241 | 62242 | 62243 |