


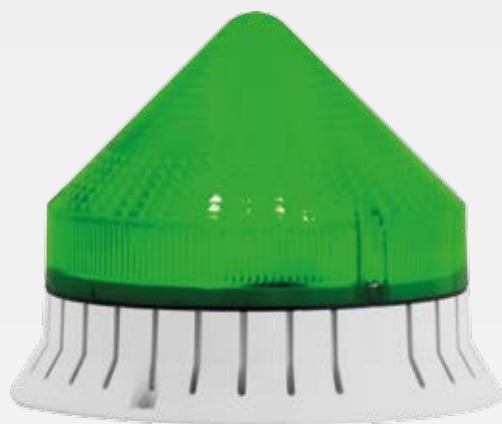
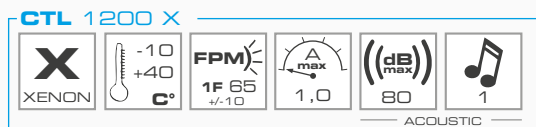


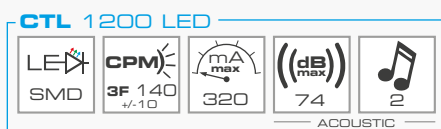

CTL 1200

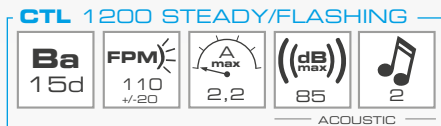

> VERSIONS WITH ACOUSTICS < > 3 LUMINOUS SOURCES <



ALSO AVAILABLE

CTL 1200
ACOUSTIC
(Acoustic
version)

CTL 1200

Luminous device, 120mm diameter, engineered for industrial applications on machinery.

Available with different luminous sources:

- Incandescent lamp with Ba 15d socket (STEADY and STEADY/FLASHING versions)
- latest SMD LED technology (LED version)
- flashing light with Xenon discharge tube (X version).

The device is also available with integrated acoustic signaling (ACOUSTIC versions).

KEY CHARACTERISTICS

LIGHT EFFECTS

CTL 1200 STEADY: STEADY LIGHT

CTL 1200 STEADY/FLASHING and LED: STEADY/FLASHING LIGHT

CTL 1200 X: XENON FLASHING LIGHT

NUMBER OF TONES (for ACOUSTIC versions)

CTL 1200 STEADY/FLASHING and LED | 2 (Continuous and Intermittent Sound)

CTL 1200 X | 1 (Intermittent Sound)

VOLTAGES

CTL 1200 STEADY: 12/240V ACDC +/-10%

CTL 1200 STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10%

CTL 1200 STEADY/FLASHING ACOUSTIC: 12V ACDC, 24V ACDC, 48V ACDC, 110V AC, 240V AC +/-10%

CTL 1200 LED and ACOUSTIC: 12/24V ACDC, 90/240V AC +/-10%

CTL 1200 X and ACOUSTIC: 12/24V ACDC, 110V AC, 240V AC +/-10%

PROTECTION GRADE

IP54 | ACOUSTIC: IP30

OPERATING TEMPERATURE

-30/+50 °C | X: -10/+40 °C

MECHANICAL FEATURES

ABS base, polycarbonate dome. Screw mounting (screws not included)

OPTICAL FEATURES

25W Incandescent lamp with Ba 15d socket

SMD LED technology: flashing effect (triple-flash 3F)

Xenon discharge tube: Powerful 6J single flash (1F)

ACOUSTIC FEATURES


CTL 1200 STEADY/FLASHING: continuous sound (with steady light) or intermittent sound F/m 110 (with flashing light). Frequency: 3600Hz

CTL 1200 LED: continuous sound (with steady light) or intermittent sound F/m 160 (with flashing light). Frequency: 2700Hz

CTL 1200 X: intermittent sound F/m 65. Frequency: 3700Hz

ACOUSTIC versions with integrated piezoelectrical unit

DRAWINGS, DIMENSIONS AND WEIGHTS

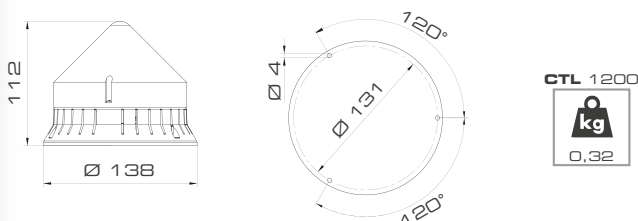

CERTIFICATIONS



600		71190		71191		71192		71193		71194		71195
900		71196		71197		71198		71199		71200		71201
1200		71090		71091		71092		71093		71094		71095