



ROTALLARM HD




DOMES




BASES


- > HEAVY DUTY ALUMINIUM BASE <
- > 3 LUMINOUS SOURCES <
- > EXCELLENT OPTICAL PERFORMANCE <




ROTALLARM HD




ROTALLARM HD H1




ROTALLARM HD STEADY/FLASHING



ROTALLARM HD FLASHING H1



ROTALLARM HD X



ALSO AVAILABLE



ROTALLARM HD
STEADY/FLASHING
ROTALLARM HD X

ROTALLARM HD

The most successful rotating beacon in Sirena's history, engineered for industrial applications developed with heavy duty aluminium base.

Available with 3 luminous sources ROTALLARM HD offers versatility as well as a complete range of products.

KEY CHARACTERISTICS

LIGHT EFFECTS

ROTALLARM HD and ROTALLARM HD H1:

ROTATING LIGHT

ROTALLARM HD STEADY/FLASHING:

STEADY/FLASHING LIGHT

ROTALLARM HD FLASHING H1: FLASHING LIGHT

ROTALLARM HD X: XENON FLASHING LIGHT

VOLTAGES

ROTALLARM HD: 12V ACDC, 24V ACDC, 48V DC, 48V AC, 110V AC and 240V AC +/-10%

ROTALLARM HD H1: 12V ACDC, 24V ACDC +/-10%

ROTALLARM HD STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10%

ROTALLARM HD FLASHING H1: 12V ACDC, 24V ACDC +/-10%

ROTALLARM HD X: 12/24V ACDC, 110V AC and 240V AC +/-10%

PROTECTION GRADE

IP65

OPERATING TEMPERATURE

-30/+50 °C | X: -30/+40 °C

MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome

Aluminium base with M16 cable gland

Screw mounting, screws not included

Parallel axis gear drive (rotating version ROTALLARM HD and ROTALLARM HD H1)

OPTICAL FEATURES

ROTALLARM HD: anodized aluminium reflector with BA 15s 45W bulb (for 12V ACDC, 24V ACDC, 48V DC versions) or E14 25W bulb (for 48V AC, 110V AC and 240V AC versions)

ROTALLARM HD H1: anodized aluminium reflector with H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM HD STEADY/FLASHING: 40W Incandescent lamp with Ba 15d socket

ROTALLARM HD FLASHING H1: H1 55W (12V) or 70W (24V) halogen bulb

ROTALLARM HD X: Xenon discharge tube 6J, allows a high intensity single flash (1F)

CERTIFICATIONS






GRID



WALL SUPPORT

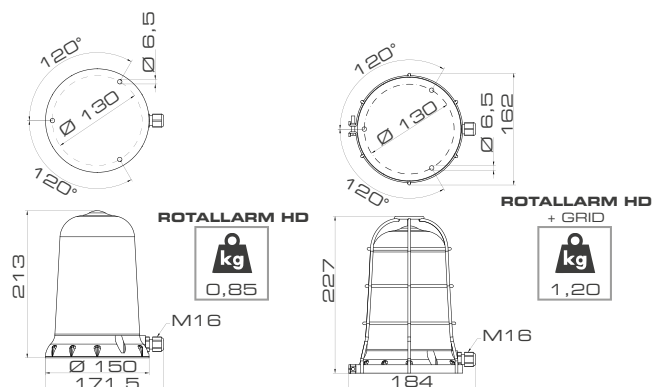**ROTALLARM HD*** - Rotating beacon with incandescent bulb

						
	BK	BK	BK	BK	BK	BK
12V ACDC	82201	82200	82203	82204	82270	82202
24V ACDC	82211	82210	82213	82214	82271	82212
48V DC	82246	82245	82290	82330	82248	82289
48V AC	82220	82280	82281	82331	82282	82332
110V AC	82226	82225	82228	82229	82247	82227
240V AC	82241	82240	82243	82244	82274	82242

*Supplied with bulb

ROTALLARM HD H1* - Rotating beacon with halogen bulb

						
	BK	BK	BK	BK	BK	BK
12V ACDC	82251	82250	82253	82254	82256	82252
24V ACDC	82261	82260	82263	82264	82273	82262

*Supplied with bulb

ROTALLARM HD STEADY/FLASHING* - Steady/flashing light with incandescent bulb

						
	BK	BK	BK	BK	BK	BK
12/48V DC	89491	89492	89493	89494	89495	89496
24/240V AC	89511	89512	89513	89514	89515	89516

*Supplied with bulb

ROTALLARM HD FLASHING H1* - Flashing light with halogen bulb

						
	BK	BK	BK	BK	BK	BK
12V ACDC	82441	82442	82443	82444	82445	82446
24V ACDC	82461	82462	82463	82464	82465	82466

*Supplied with bulb

ROTALLARM HD X* - Flashing light with Xenon discharge tube

						
	BK	BK	BK	BK	BK	BK
12/24V ACDC	84751	84752	84753	84754	84755	84756
110V AC	84761	84762	84763	84764	84765	84766
240V AC	84771	84772	84773	84774	84775	84776

*Supplied with bulb

SPARE DOMES ROTALLARM HD and H1

Internally smooth	 71306	 71305	 71308	 71309	 71331	 71307
-------------------	---	---	---	---	---	---

SPARE DOMES ROTALLARM HD STEADY/FLASHING and X

Internally fluted	 71301	 71300	 71303	 71304	 71330	 71302
-------------------	---	---	---	---	---	---

ACCESSORIES

	STL	BK
GRID for HD versions	71690	
WALL SUPPORT		71818