




FAROLAMP LED S



> SUPERBRIGHT <
> EXCELLENT OPTICAL PERFORMANCE <
> MULTIFUNCTIONAL <

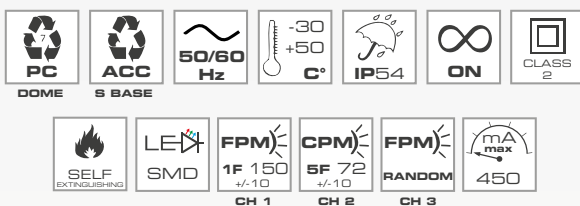

ALSO AVAILABLE



FAROLAMP LED P

FAROLAMP LED | PART NO

	Blue	Orange	Red	Green	Yellow	White
12/24V ACDC						
S	85091	85092	85093	85094	85095	85096
P	85224	85225	85226	85227	85228	85229

SPARE DOMES

71326	71325	71328	71329	71293	71327
-------	-------	-------	-------	-------	-------

FAROLAMP LED

new

Multifunctional LED beacon with high optical performance engineered for industrial applications.

Developed with a multichannel technology, FAROLAMP LED allows three separate light effects (flashing, strobe, random light).

The separate light effects are controllable via independent electric contacts.

2 bases available (standard S and pole mount P).

KEY CHARACTERISTICS

LIGHT EFFECTS

FLASHING, STROBE, RANDOM LIGHT

VOLTAGES

12/24V ACDC +/-10%

PROTECTION GRADE

IP54

OPERATING TEMPERATURE

-30/+50 °C

MECHANICAL FEATURES

Self-extinguishing PC dome

High impact resistance steel base. Screw mounting, screws not included (S base version)

OPTICAL FEATURES

2x SuperBright LEDs allow 3 luminous effects:



FLASHING LIGHT: Powerful flashing effect (1F)

STROBE LIGHT: Strobe effect (5F)


RANDOM LIGHT: A unique random effect consisting in an uneven flashing pattern, augmenting the ability of catching attention

The dome-shaped Fresnel lens intensify the luminous beam of these devices

DRAWINGS, DIMENSIONS AND WEIGHTS



FAROLAMP LED S



FAROLAMP LED P



CERTIFICATIONS

