







MAXIFLASH S



> 3 BASES <
> 2 LUMINOUS SOURCES <
> EXCELLENT OPTICAL PERFORMANCE <



ALSO AVAILABLE



MAXIFLASH P



MAXIFLASH E

MAXIFLASH

Medium size beacon engineered for industrial applications.

MAXIFLASH offers versatility as well as excellent optical performance.

With three versions available (standard S, pole mount P, Edison screw base E) and 2 luminous sources, MAXIFLASH offers a complete range of products.

KEY CHARACTERISTICS

LIGHT EFFECTS

MAXIFLASH STEADY: STEADY LIGHT

MAXIFLASH STEADY/FLASHING: STEADY/FLASHING LIGHT (S and P bases), FLASHING LIGHT (E base)

MAXIFLASH X: XENON FLASHING LIGHT

VOLTAGES

MAXIFLASH STEADY: 12/240V ACDC +/-10%

MAXIFLASH STEADY/FLASHING: 12/48V DC, 24/240V AC +/-10%

MAXIFLASH X: 12/24V ACDC, 110V AC and 240V AC +/-10%

PROTECTION GRADE

IP54

OPERATING TEMPERATURE

-30/+50 °C | X: -30/+40 °C

MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome

Self-extinguishing glass reinforced polyamide base (S base versions with M16 cable gland)

Screw mounting, screws not included (S base versions)

OPTICAL FEATURES

MAXIFLASH STEADY: the 25W or 40W incandescent lamp (Ba15d socket) and the dome-shaped Fresnel lens intensify the steady beam of light

MAXIFLASH STEADY/FLASHING: the 25W or 40W incandescent lamp (Ba15d socket) and the dome-shaped Fresnel lens intensify the steady/flash beam of light


MAXIFLASH X: 6J Xenon discharge tube enhanced by the dome-shaped Fresnel lens provides a strong single flash (1F)

CERTIFICATIONS





WALL BASE

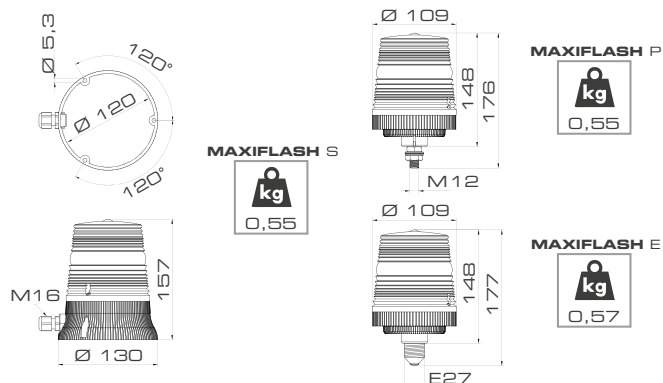**MAXIFLASH STEADY*** - Steady light with incandescent bulb

BASES	GY		BK		GY		BK		GY		BK		GY		BK	
S 12/240V ACDC	89271	89281	89272	89282	89273	89283	89274	89284	89275	89285	89276	89286				
P 12/240V ACDC	89291	89301	89292	89302	89293	89303	89294	89304	89295	89305	89296	89306				
E 12/240V ACDC	89311	89321	89312	89322	89313	89323	89314	89324	89315	89325	89316	89326				

*Supplied without bulb

MAXIFLASH STEADY/FLASHING* - Steady/flashing light with incandescent bulb

BASES	GY		BK		GY		BK		GY		BK		GY		BK	
S 12/48V DC	89331	89351	89332	89352	89333	89353	89334	89354	89335	89355	89336	89356				
24/240V AC	89341	89361	89342	89362	89343	89363	89344	89364	89345	89365	89346	89366				
P 12/48V DC	89371	89391	89372	89392	89373	89393	89374	89394	89375	89395	89376	89396				
24/240V AC	89381	89401	89382	89402	89383	89403	89384	89404	89385	89405	89386	89406				
E 12/48V DC	89621	89681	89622	89682	89623	89683	89624	89684	89625	89685	89626	89686				
24/240V AC	89411	89421	89412	89422	89413	89423	89414	89424	89415	89425	89416	89426				

*Supplied without bulb

MAXIFLASH X* - Flashing light with Xenon discharge tube

BASES	GY		BK		GY		BK		GY		BK		GY		BK	
S 12/24V ACDC	63865	21668	63866	21669	63867	21670	63868	21671	63869	21672	63870	21673				
110V AC	63871	84030	63872	84026	63873	84029	63874	84056	63875	84055	63876	84028				
240V AC	63877	84037	63878	84036	63879	84039	63880	84038	63881	84062	63882	84040				
P 12/24V ACDC	63917	21698	63922	21699	63918	21700	63919	21701	63920	21702	63921	21703				
110V AC	63923	84229	63924	84225	63925	84221	63926	84246	63927	84228	63928	84227				
240V AC	63929	84236	63930	84235	63931	84238	63932	84239	63933	84250	63934	84237				
E 12/24V ACDC	89661	84281	89662	84282	89663	84283	89664	84284	89665	84285	89666	84286				
110V AC	63965	84318	63966	84325	63967	84328	63968	84327	63969	84319	63970	84320				
240V AC	63969	84336	63970	84335	63971	84338	63975	84337	63976	84350	63972	84339				

*Supplied with bulb

SPARE DOMES

	71321		71320		71323		71324		71334		71322
--	-------	--	-------	--	-------	--	-------	--	-------	--	-------

ACCESSORIES

	GY	BK
WALL BASE	72692	71872