

ROTALLARM S LED


SIRENA ELECTRA



ROTALLARM S LED



> **VIBRATION-PROOF** <
> **MULTIFUNCTIONAL** <

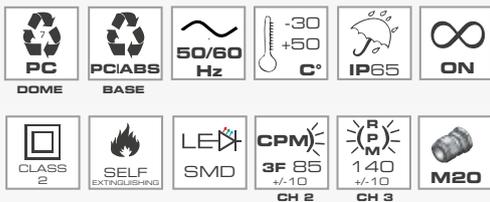

ACCESSORIES



GRID for P BASE



P BASE
Base for pole mounted installations (Ø 48,5) with 2 retaining dowels. Recommended for use with black base product.



WALL BASE

ROTALLARM S LED | PART NO

	Blue	Orange	Red	Green	Yellow	White
GY	12/24V ACDC					
	90061	90062	90063	90064	90065	90066
	90/240V AC					
	90081	90082	90083	90084	90085	90086
BK	12/24V ACDC					
	90071	90072	90073	90074	90075	90076
	90/240V AC					
	90091	90092	90093	90094	90095	90096
SPARE DOMES						
	71301	71300	71303	71304	71330	71302
BK	P BASE for ROTALLARM S LED					83005
STL	GRID for P BASE					90883
GY	WALL BASE					72692
BK	WALL BASE					71872

ROTALLARM S LED new

ROTALLARM S LED is the latest addition to the most successful rotating beacon in Sirena's history.

With a powerful multitenion and multifunctional SMD LED electronic circuit, ROTALLARM S LED offers outstanding performances together with high life expectancy as well as 3 light effects.

With its IP65 rating, ROTALLARM S LED is the most advanced Rotallarm ever.

KEY CHARACTERISTICS

LIGHT EFFECTS
STEADY LIGHT
ROTATING LIGHT
FLASHING LIGHT

VOLTAGES
12/24V ACDC, 90/240V AC +/-10%

PROTECTION GRADE
IP65

OPERATING TEMPERATURE
-30/+50 °C


MECHANICAL FEATURES

Self-extinguishing high impact resistance PC dome
PC/ABS base
Screw mounting, screws not included
No moving parts
Polyurethane gasket on base
M20 cable gland supplied

OPTICAL FEATURES

32x 5050 Bright LEDs

DRAWINGS, DIMENSIONS AND WEIGHTS

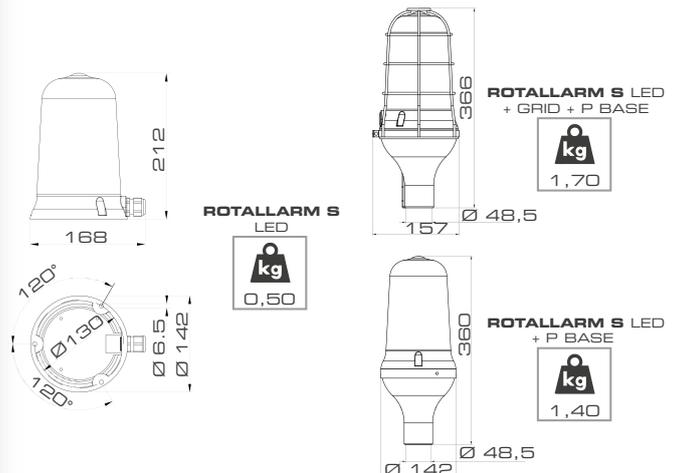

CERTIFICATIONS

