




> **SUPERBRIGHT** <
> **EN54-23 APPROVED** <



CAN BE INSTALLED WITH

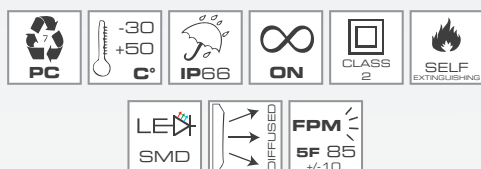

See Base Section on page 30

	SHALLOW	DEEP	WALL
12/24V AC/DC	✓	✓	✓
PNP 12/24V DC	✗	✗	✓
	FLUSH	DOUBLE	POLE

SLR FA | PART NO

SLR FA — **R** 90126 **W** 90125

SLR FA **new**

EN54-23 approved LED beacon with excellent optical performance. SLR FA allows a powerful EN54-23 approved strobe flashing effect.

SLR FA is the ideal choice for a high-end signaling device suitable for short and long distance signalization.

TECHNICAL SPECIFICATIONS

HIGH OPTICAL PERFORMANCE

STROBE

5x flash (strobe effect) ideal for all applications where gaining public attention is a must

VOLTAGES

Must be used with LT 12/24V base

PROTECTION GRADE

IP66, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 °C

LED TECHNOLOGY

Virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000* hours of product life

* At normal conditions, without vibrations and heavy temperature changes

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP66 protection grade

OPTICAL FEATURES

2 x SuperBright LEDs with inner Fresnel lens

CERTIFICATIONS



CONSTRUCTION PRODUCT DIRECTIVE
EN54-23 | PENDING

DRAWINGS, DIMENSIONS AND WEIGHTS

