



FLEXIBLE ISO A
(MOUNT ON
ADAPTER SOCKET)

ROTATOR FLEXI

- > ECE R65 APPROVED <
- > EXCELLENT OPTICAL PERFORMANCE <
- > VERSATILE SOLUTIONS <



ALSO AVAILABLE WITH



ISO B1
(FLAT BASE)

ROTATOR B

ISO A BASE
(MOUNT ON
ADAPTER SOCKET)

ROTATOR A

ISO C BASE
(M12 SINGLE BOLT
FIXING BASE)

ROTATOR POLE

MAGNETIC BASE,
HELIX CABLE AND
CIGARETTE LIGHTER PLUG

ROTATOR MAGNETIC

ROTATOR | PART NO

	ROTATOR (ROTATING BEACON)	
	12V (WITH BULB)	24V (WITH BULB)
	A	A
FLEXI	90160	90161
B	90162	90163
A	90164	90165
POLE	90145	90146
MAGNETIC	90166	90167

ROTATOR

Approved rotating beacons with polycarbonate dome.

Fibreglass reinforced polyamide bases.

FLEXI: vibration-proof thermoplastic flexible base and unbreakable polycarbonate dome.

Developed with halogen light source H21W.

KEY CHARACTERISTICS

VOLTAGE

12V DC (with bulb)
24V DC (with bulb)

MOTOR

Ultra silent drive belt technology
Rotation through ball bearing
Radio interference filter integrated in the motor

LIGHT INTENSITY

According to ECE R65

PROTECTION GRADE

IP55

OPERATING TEMPERATURE

-30/+50 °C

MECHANICAL FEATURES


ROTATOR: polycarbonate dome (screw in mount) and fibreglass reinforced polyamide bases

ROTATOR FLEXI: flexible EPDM base (according to ISO 4148, standard form A) and unbreakable polycarbonate dome

OPTICAL FEATURES

Metallized polycarbonate reflector.
Halogen light source H21W allowing high optical performances as well as low power consumption

DRAWINGS, DIMENSIONS AND WEIGHT

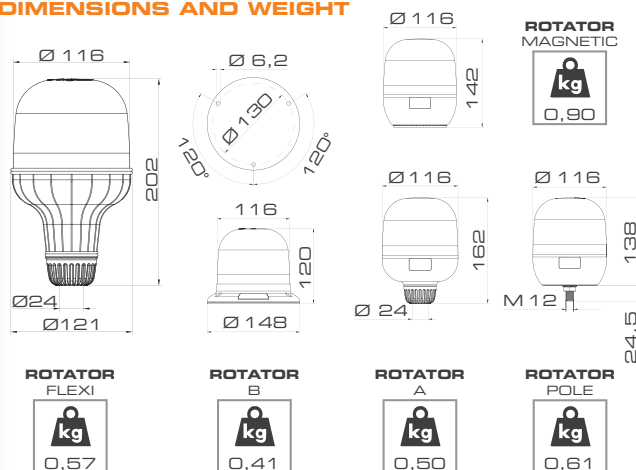

CERTIFICATIONS



HOMOLOGATION NUMBERS

	ROTATOR (ROTATING BEACON)
ECE R65 TA1 E3	007141 A
EMC UNECE 10R E3	03 1207 (12V)
EMC UNECE 10R E3	03 1207 (24V)