


## X



allCLEAR


new

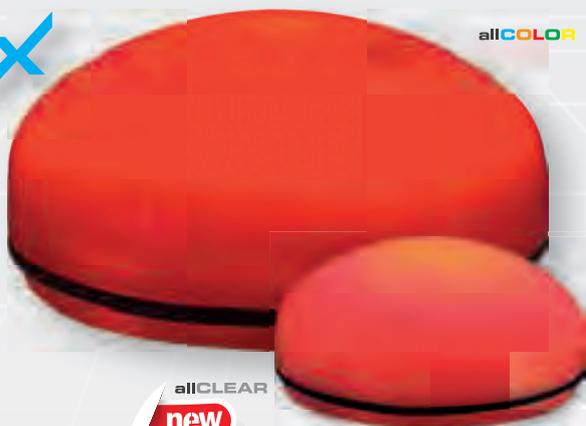

allCLEAR

new

**B A R G**

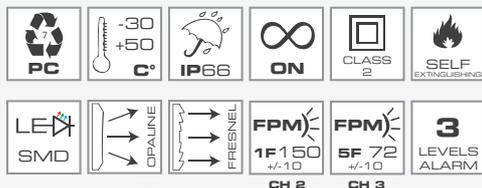

**X**

### CAN BE INSTALLED WITH

**G B R W**

See Base Section on page 30

	SHALLOW	DEEP	WALL
12/24V ACDC	✓	✓	✓
PNP 12/24V DC	X	X	✓
40/80V ACDC	X	✓	✓
120/240V AC	X	✓	✓
JR 120/240V AC	X	✓	✓
	FLUSH	DOUBLE	POLE

### XLF S | PART NO

allCOLOR	B	A	R	G
PROXIMITY	90501	90502	90503	90504
DIRECTIONAL	90821	90822	90823	90824
allCLEAR				
PROXIMITY	90141	90142	90143	90144
DIRECTIONAL	90151	90152	90153	90154

## XLF S

Multifunctional LED beacon engineered to satisfy the most demanding applications. Developed with a multichannel technology, XLF S allows three different light effects (steady, flashing, strobe) controllable via independent electric contacts making this device the perfect choice for most applications.

Available with Proximity and Directional lenses, XLF S is the ideal choice for a high-end signaling device.

### PROXIMITY

Opaline lens for near signalization

### DIRECTIONAL

Fresnel lens for long-distance signalization

### TECHNICAL SPECIFICATIONS

#### MULTIFUNCTION

3 separate functions (steady, flashing, strobe) controllable via independent electric contacts

#### HIGH OPTICAL PERFORMANCE

##### CHANNEL 1 | STEADY

An intense and rich light output that allows gaining public attention yet without disturbing

##### CHANNEL 2 | FLASHING

A constant flash ideal for signaling a change of operating circumstances

##### CHANNEL 3 | STROBE

5x flash (strobe effect) ideal for all applications where gaining public attention is a must

#### VOLTAGES

According to the installed base

#### PROTECTION GRADE

IP66, UL TYPE 4X, suitable for outdoor applications

#### OPERATING TEMPERATURE

-30/+50 °C

#### LED TECHNOLOGY

Virtually zero maintenance thanks to the built-in LED technology that guarantees up to 100.000\* hours of product life

\* At normal conditions, without vibrations and heavy temperature changes

### MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP66/TYPER 4X protection grade

### OPTICAL FEATURES

1 x SuperBright LED. Available with 2 different lens types, according to the final application

#### allCOLOR STANDARD USE

Colored lens with colored light source. The use of a colored lens with the same-color light source allows optimization of the emission frequency producing a rich intense light output

#### allCLEAR USE IN VERY BRIGHT ENVIRONMENTS

Clear lens with colored light source. In very bright environments it is possible that the ambient brightness lights up the device when it is switched OFF creating problems in distinguishing between the ON and OFF state of the device (phantom effect). The clear lens allows clear distinction between the ON and OFF status of the device

### CERTIFICATIONS



### DRAWINGS, DIMENSIONS AND WEIGHTS

