



EX 050 OVO M SMD



V 	12/24		90/240	
V 			-	-
mA 	140	175	30	20
mA 	50	50	-	-
FPM: STEADY, 0 - 1F, 120±10 2F, 2X90±10 - 3F, 3X140±10				
IP 66	On 		°C -25 +50	
 M25x1.5				

OVOLUX MULTI SMD


Small integrated LED beacon, ideal for alerting a change in machinery operational circumstances in explosive atmospheres. Designed according to ATEX regulations, OVOLUX MULTI SMD can be used in Group II explosive areas, Zones 1, 2, 21, 22.

Fitted with an electronic SMD LED circuit, OVOLUX MULTI SMD is particularly resistant to vibrations guaranteeing longer lifetime of the product and a significant reduction in maintenance costs. Multifunctional product allowing 4 different light options: steady, single flash, double flash, triple flash selectable via internal dip-switch.



**II 2GD Ex de IIC T6 Ex tD A21 IP66
T85 °C**

- Approval: **CESI 05 ATEX 043**
- Housing in copper-free aluminium alloy
- Polyester paint RAL 3020
- Voltages available:
- 12V/24V ACDC, 90/240V AC
- Colors available: blue - amber - red - green - yellow - clear
- Protection: IP 66
- Maximum surface temperature: T6
- High light intensity
- DIP-SWITCH to select the light functions (steady, single flash, double flash, triple flash)

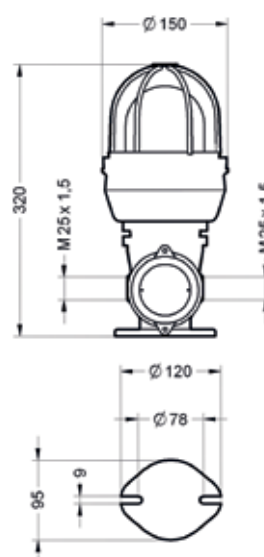

Kg: 2.58

CODES

EX 050 OVO M SMD

	●	●	●	●	●	●
12/24V ACDC	97191	97192	97193	97194	97195	97196
90/240V AC	97201	97202	97203	97204	97205	97206