

WID05 - 15ZX0X

Anti-condensation heaters

HEATING POWER

45 - 100 - 150 W




Accessories

Thermostat 0-60°C, normally closed, 10A	AAWTC10
Thermostat 10-60°C, change-over contact, 10A	AAWTS10
Humidistat, RH 35-95% change-over contact, 5A	AAWHS10

Features	UoM	WID05ZX0X	WID10ZX0X	WID15ZX0X
Heating power*	W	45	100	150
Power supply	V ~ Hz	110-250 V AC/DC	110-250 V AC/DC	110-250 V AC/DC
Dimensions HxWxD	mm	109x70x50	184x70x50	264x70x50
Max current	A	3.5	4.5	9
Heating element	-	self-regulated PTC	self-regulated PTC	self-regulated PTC
Electrical connection	-	3 pole Terminal board	3-pole Terminal board	3-pole Terminal board
IEC protection class	-	I	I	I
IP rating EN60529	-	IP20	IP20	IP20
Radiator	-	Extruded alumin- ium profile	Extruded alumin- ium profile	Extruded alumin- ium profile
Clip installation for DIN rail	mm	35	35	35
Weight	kg	0.3 CE	0.5 CE	0.7 CE
Conformity	-			

* At 20 °C ambient temperature

Dimensions

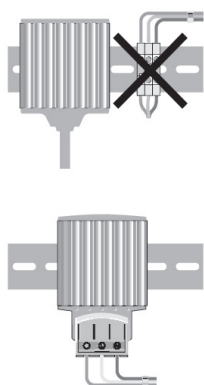

Facilitated installation with
quick-connection terminals

W mm	
WID05ZX0X	65
WID10ZX0X	140
WID15ZX0X	220

