


TECHNICAL DATASHEET

SCL 3 POLE DC CONTACTOR



- 32 - 40 Amp Standard Contactor
- AC3 IEC60947 - UL508
- Touchproof Terminals
- DIN Rail and Base Mount
- 3 pairs of Main Contacts
- DC Coil
- 24V & 110V Coils
- Other Coil Voltages available on request
- 2 NO + 2 NC Auxiliary Contacts
- Thermal Overload Relay Type TO-40
- Overload Relays and additional accessories available

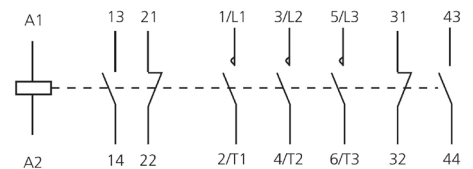

Part Number	Coil Voltage	AC3 Motor Rating	380-440V AC3	AC1 Amps	Aux Contact
C32-22-3P-24VDC	24 VDC	32 Amp	15 Kw	50 Amp	2NO + 2NC
C32-22-3P-110VDC	110 VDC	32 Amp	15 Kw	50 Amp	2NO + 2NC
C40-22-3P-24VDC	24 VDC	40 Amp	18.5 Kw	60 Amp	2NO + 2NC
C40-22-3P-110VDC	110 VDC	40 Amp	18.5 Kw	60 Amp	2NO + 2NC

