



TECHNICAL DATASHEET

SCL 3 POLE AC CONTACTOR

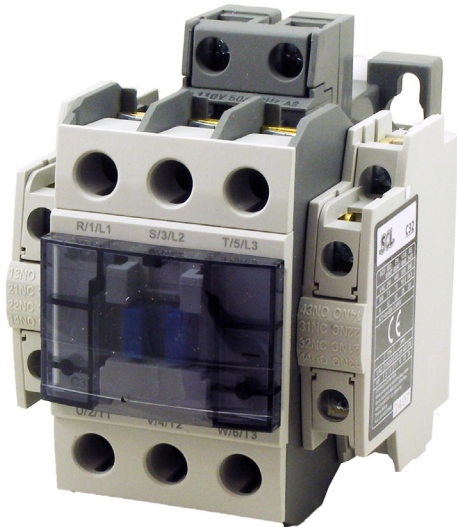

- 32 - 40 Amp Standard Contactor
- AC3 IEC60947 - UL508
- Touchproof Terminals
- DIN Rail and Base Mount
- 3 pairs of Main Contacts
- 50/60Hz AC Coil
- 24V, 110V, 240V & 415V Coils
- 12V & 48V Coils available on request
- 2 NO + 2 NC Auxiliary Contacts
- Thermal Overload Relay Type TO-40
- Overload Relays and additional accessories available

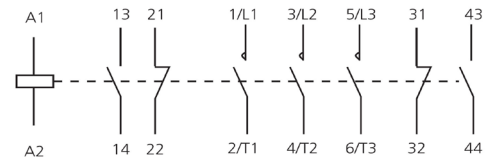

Part Number	Coil Voltage	AC3 Motor Rating	380-440V AC3	AC1 Amps	Aux Contact
C32-22-3P-24VAC	24 VAC	32 Amp	15 Kw	50 Amp	2NO + 2NC
C32-22-3P-110VAC	110 VAC	32 Amp	15 Kw	50 Amp	2NO + 2NC
C32-22-3P-240VAC	240 VAC	32 Amp	15 Kw	50 Amp	2NO + 2NC
C32-22-3P-415VAC	415 VAC	32 Amp	15 Kw	50 Amp	2NO + 2NC
C40-22-3P-24VAC	24 VAC	40 Amp	18.5 Kw	60 Amp	2NO + 2NC
C40-22-3P-110VAC	110 VAC	40 Amp	18.5 Kw	60 Amp	2NO + 2NC
C40-22-3P-240VAC	240 VAC	40 Amp	18.5 Kw	60 Amp	2NO + 2NC
C40-22-3P-415VAC	415 VAC	40 Amp	18.5 Kw	60 Amp	2NO + 2NC

