




CBB200A-600 BUSBAR CHAMBER

Technical Data	
Standard	BS EN 61439-1
Rated Current In	200A
Rated Voltage Ue	230/400V
Rated Insulation Voltage Ui	690V
Rated Frequency	50/60Hz
Rated Conditional Short-Circuit Current (Icc)	36kA
Enclosure	1.6mm mild steel
Finish	Matt grey to RAL 7035
IP Rating	3X
Pollution Degree	3
No of Poles	4
Cable Entry	Top/Bottom glandplates
BusBar Connection	CBBB8-200A clamp (4 off – M8 bolts)
Earth Connection	M10
Ambient Operating Temp.	-5 to 40 °C
Weight	13.5kg

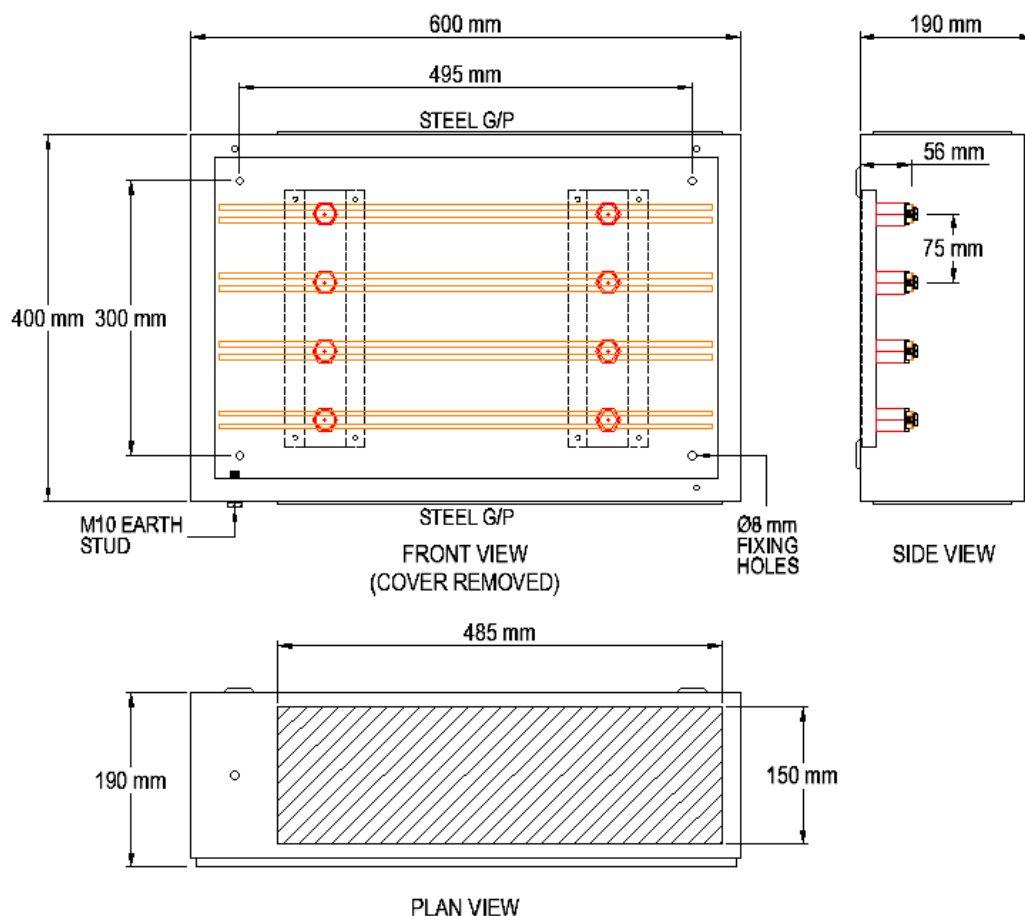

Telephone: 01785 818600 email: sales@switchtec.com Web: www.switchtec.com