
# **CMR753**





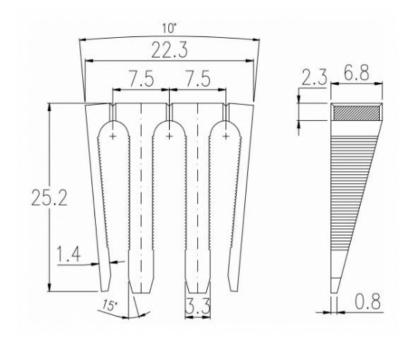

## **GENERAL INFORMATION**

pitch: 7,5 mm 0.00 mm housing height: housing depth: mm dimensional class: n/a wire section:

clamp opening size:

wire stripping:

-°C ÷ +°C operating temperature:

## **ELECTRICAL CHARACTERISTICS**

current: Α voltage: test voltage: kVrms/60s

## MECHANICAL CHARACTERISTICS

## **APPROVALS DATA**







## **MATERIALS**

current: voltage: FILE:

PA - UL 94 V0 housing:

screw: n/a clamp/spring: n/a

terminal: n/a

## **AVAILABLE COLOURS**











other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*	
3	CMR753	N/A	N/A	N/A	