





- Type 1 + 2 + 3 AC surge protector
- VG Technology
- I_n : 20 kA
- I_{imp} : 12,5 kA on 10/350 μ s impulse
- No leakage current
- Pluggable module for each phase
- Remote signaling
- Optimized to TOV
- EN 61643-11, IEC 61643-11 and UL1449 ed.5 compliance
- Certified EN 61643-11 and IEC 61643-11

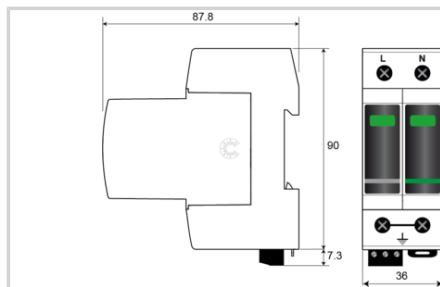

V: High-energy varistor
GSG: Specific gas tube
Ft: Thermal fuse
C: Remote signaling contact
t*: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics

SPD type	1+2+3
Network	230 V single-phase
AC system	TT-TN
Max. AC operating voltage	Uc 275 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac withstand
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT 1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	Ipe None
Follow current	If None
Nominal discharge current 15 x 8/20 μ s impulses	In 20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax 50 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	Imax Total 100 kA
Impulse current by pole max. withstand 10/350 μ s by pole	Iimp 12.5 kA
Total lightning current max. total withstand @ 10/350 μ s	Itotal 25 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 μ s - 8/20 μ s	Uoc 6 kV
Specific energy by pole max. withstand 10/350 μ s	W/R 40 kJ/ohm
Protection mode(s)	L/N and N/PE
Protection level @ In (8/20 μ s) and @ 6 kV (1,2/50 μ s)	Up L/N 1.5 kV
Protection level N/PE @ In (8/20 μ s) and @ 6 kV (1,2/50 μ s)	Up N/PE 1.5 kV
Residual voltage L/N at 5 kA @ 5 kA (8/20 μ s)	Up-5kA 0.7 kV
Protection level N/PE at 5 kA @ 5 kA (8/20 μ s)	Up-5kA 0.7 kV
Admissible short-circuit current	Iscrr 50 000 A

Mechanical Characteristics

Technology	VG Technology (MOV+GSG)
SPD configuration	Single phase
Connection to Network	By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Spare module(s)	MDAC1-13VG-275 + MDAC1-25G-xxx
Remote signaling of disconnection	output on changeover contact
Wiring for remote signaling	1.5 mm ² max.
Max. Voltage/Current for remote signaling	250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions	See diagram - 2TE (EN43880)

Disconnectors

Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
	Fuse assembly: SFD1-13S-11 / or 125 A min. - 315 A max. -

DAC1-13VGS-11-275

Back-up protection device	Fuses Type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	KEMA
Part number	
821730242	