




- UL Type 1 CA DC SPD for PV Systems
- VG Technology for Maximum Performance
 - Zero Leakage Current
 - Zero Current Working
 - I_{max} : 40kA/pole at 8/20μs
 - I_n : IEC 20kA/pole, UL 10kA/pole at 8/20μs
 - UL 1449 4th Edition Recognized

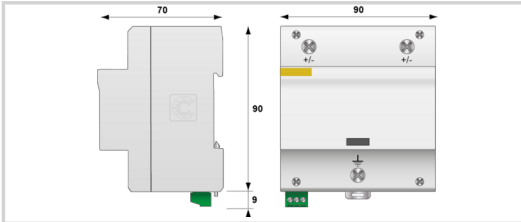

Electrical Characteristics		
Protection level +/-PE (-/PE) @ In (8/20μs)	Up	2.8 kV
Voltage Protection Level VPR	V	4000.0000
Voltage Protection Level VPR	V	3000.0000
Voltage Protection Level VPR	V	3000.0000
Mechanical Characteristics		
Technology	VG Technology (MOV+GSG)	
Connection to Network	By screw terminals: 4-25mm²	
Weight	0.565 kg	
Standards		
Certification	UL	
Part number		
3947		