

# LIGHT

## IP65-67 JUNCTION BOXES

Description: IP65-67 WATERTIGHT JUNCTION BOX WITH PLAIN SIDES AND TRANSPARENT COVER

Reference:  
**ELT231**

### Characteristics:

<b>Product type:</b>	Watertight junction boxes with transparent cover and plain sides
<b>Exterior dimensions (Height x Width x Depth):</b>	185x246x100 mm
<b>Dimensions of the flush-fit gap (HxWxD):</b>	-
<b>Number of modules:</b>	-
<b>Installation:</b>	Surface
<b>Color:</b>	RAL 7035
<b>Window:</b>	Transparent
<b>Weight (kg):</b>	0,53
<b>Cable entry:</b>	-
<b>Components:</b>	-
<b>Materials:</b>	Matériaux plastiques sans halogène. Base: PS antichoc
<b>Lid-window-door material:</b>	Tinted PC, UV protection

### Technical data:

<b>Degree of protection:</b>	IP65 and IP67
<b>Resistance to impact:</b>	IK07
<b>Glow wire resistance:</b>	650 °C
<b>Ball pressure test:</b>	70 °C
<b>Ambient temperature range:</b>	-25 °C / +40 °C
<b>Maximum material temperature:</b>	
<b>Maximum operating voltage:</b>	1000 V AC / 1500 V DC
<b>Rated current:</b>	
<b>Double insulation:</b>	Class II

### Certificates and standards:

<b>Directive:</b>	2014/35/EU
<b>Standards:</b>	IEC 60670-22
<b>Certificates:</b>	



### Codes:




<b>EAN:</b>	8431044194202
<b>Customs tariff number:</b>	85.38.10.00
<b>ETIM 8.0:</b>	EC002600

# LIGHT

## IP65-67 JUNCTION BOXES

Description: IP65-67 WATERTIGHT JUNCTION BOX WITH PLAIN SIDES AND TRANSPARENT COVER

Reference: ELT231

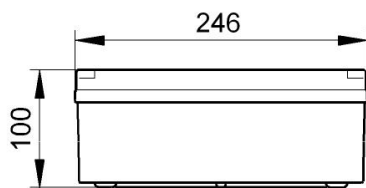

### Detailed drawing:

 <https://www.ide.es/downloads/planos/pdf/ELT231.pdf>

 <https://www.ide.es/downloads/planos/dxf/ELT231.dxf>

 <https://www.ide.es/downloads/planos/stp/ELT231.stp>

### Exterior dimensions (Height x Width x Depth):

185x246x100 mm

### Dimensions of the flush-fit gap (Height x Width x Depth):

-

### Sustainability:

RoHS - REACH

### Supply:

The boxes are supplied individually, shrink-wrapped and in multiple cardboard packaging, according to minimum packaging units.

**Packaging units:** 6

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.