

AUDIBLE & VISUAL ALARMS

COMBINED SOUNDER & XENON BEACON


STRIDOR XENON SERIES

- Indoor or Outdoor Surface Mount
- High Quality, High Output
- Fully Sealed IP65
- 5 Colours
- Wide Operating Voltage
- Available in Red or White
- Independent Beacon or Sounder control



Part Code	Voltage	Base Type	Colour
FL/AL/W/D/SEP/SW	18-28VDC	Deep / White	Amber
FL/BL/W/D/SEP/SW	18-28VDC	Deep / White	Blue
FL/CL/W/D/SEP/SW	18-28VDC	Deep / White	Clear
FL/GL/W/D/SEP/SW	18-28VDC	Deep / White	Green
FL/RL/R/D/SEP/SW	18-28VDC	Deep / Red	Red
FL/AL/W/D/SEP/SW/240V	110-240VAC	Deep / White	Amber
FL/BL/W/D/SEP/SW/240V	110-240VAC	Deep / White	Blue
FL/CL/W/D/SEP/SW/240V	110-240VAC	Deep / White	Clear
FL/GL/W/D/SEP/SW/240V	110-240VAC	Deep / White	Green
FL/RL/R/D/SEP/SW/240V	110-240VAC	Deep / Red	Red

Dimensions

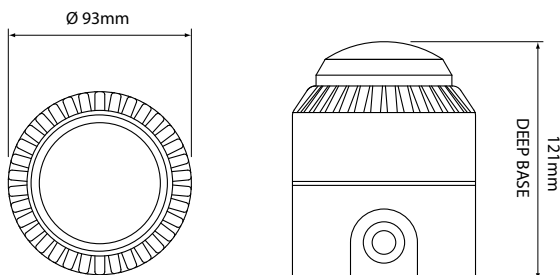

Accessories

Part Code	Description	Voltage
Deep Base White	White Deep Base	-
Deep Base Red	Red Deep Base	-
Powered Base White	White Powered Base	110-240VAC
Powered Base Red	Red Powered Base	110-240VAC
Av Mains Module	Replacement Power Module	110-240VAC

Technical Data

Flash Rate Hz	Output J	Current Consumption mA	Temperature °C	IP Rating	Sound Output dB	Weight Kg	Operating Voltage
1	0.7	68	-10 to +55	IP 65	32 Tones, 101dB	0.33	18-28VDC or 110-240VAC

Features

- 32 Selectable Tones** Selectable via the built in Dip Switch, located on the rear of the Alarm
- 2 Tones Available** The Primary selected tone has an alternative sound immediately selectable via the third Terminal
- Simple Wiring** Dual Terminal blocks for simple wiring.
- Sound Synchronisation** Fitted with a Synchronisation facility for Adjacent Sounder/Beacons
- Volume Control** Fitted with an adjustable volume control, the sounder can be adjusted from 67dB to 92dB
- Flame Retardant** Sounder constructed from Flame Retardant Polyamide (V0 to UL94)
- Deep Base** Deep Base supplied complete with 2 x 20mm Conduit Entry Knockouts

* Mains versions supplied with POWERED BASE fitted with Voltage Transformer AV MAINS MODULE