



GRP Enclosures




GRP Enclosures with Metal Back Plate



GRP-43

- Glass Reinforced Polyester enclosures
- IP66 Ingress protection
- IK10 Impact protection
- -30 to +85°C Operating temperature
- Double Insulation Class II, 1000VAC - 1500VDC
- Non Hydroscopic material
- Colour RAL7035, UV Resistant 500h
- Halogen free material
- Hinged door & supplied with metal backplate
- Manufactured to IEC 62208, CE & UKCA Approved
- Other sizes available

Part Number	Dimensions	Description
GRP-43	400 x 300 x 200mm	GRP IP66 Enclosure with Metal Back Plate
GRP-54	500 x 400 x 200mm	GRP IP66 Enclosure with Metal Back Plate
GRP-65	600 x 500 x 250mm	GRP IP66 Enclosure with Metal Back Plate
GRP-86	800 x 600 x 300mm	GRP IP66 Enclosure with Metal Back Plate
GRP-108	1000 x 800 x 360mm	GRP IP66 Enclosure with Metal Back Plate

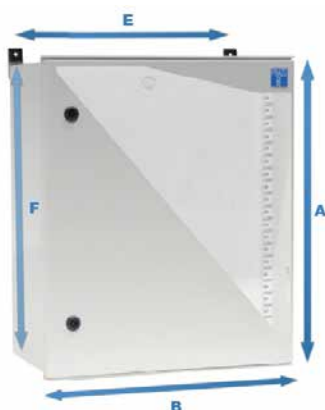

Part No	A	B	C	D	E	F	G
GRP-43	400	300	200	210	254	338	415
GRP-54	500	400	200	310	354	438	515
GRP-65	600	500	250	406	452	534	610
GRP-86	800	600	300	505	551	734	725
GRP-108	1000	800	360	715	900	920	1060

A, B & C = External Dimensions
D & F = Internal Back plate fixings
E & G = External Fixing Centres when using brackets



GRP-54



GRP-65



GRP-86