

MEASUREMENT & CONTROL

PANEL MOUNT COUNTER

H7E


- 2 Versions, Totalising and Time Counter
- 8 digit display
- 30Hz and 1KHz signal input
- Front of Panel Reset
- Backlit display
- Battery Driven



Technical parameters		H7E-C	H7E-T
Function:	Totalising Counter		Time Counter
Supply terminals:	Non, Battery Driven*		Non, Battery Driven*
Supply voltage:	3VDC		
Battery Type:	CR123A Battery (Included)		
Power Consumption:	0.8W 2.4 VA		
Backlit Voltage:	24VAC/DC		
Supply voltage tolerance:	+/- 10%		
Battery Life:	7 Years Minimum		
Display:	8 Digit	7 Digit	
Ranges:	0 - 999999999	H7E-TA = 999999.9h / 3999d23.9h H7E-TB = 999h59m59s / 9999h59.9m	
Setting:	DIP Switch		
Input:	30Hz or 1KHz		1s
Remote Reset:	Yes		
Mechanical life:	5,000,000 Ops		
Electrical life:	100,000 Ops		
Controlling			
Control terminals:	See Connection Diagram		
Impulse length:	min. 25 ms / Continuously Rated		
Reset time:	-		
Other information			
Operating temperature:	-10 / +50°C		
Humidity:	85% RH		
Operating position:	Any		
Mounting:	Panel Mount		
Protection degree:	Front of Panel IP 65		
Max. cable size:	-		
Dimensions:	24 x 48 x 60mm, see page 182		
Weight:	62g		
Standards, Approvals:	EN 61812-1, EN 61010-1, CE		

MEASUREMENT & CONTROL

Connection

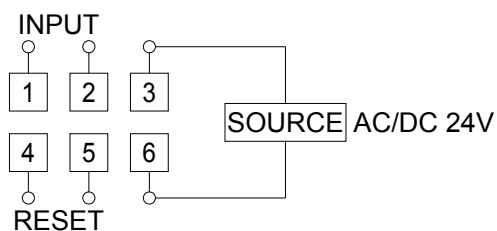

Functions

