

HF115F

MINIATURE HIGH POWER RELAY

c us

File No.:E134517



File No.:116934



File No.:CQC02001001951



Features

- Low height: 15.7 mm
- 16A switching capability
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 10mm
- VDE0435 / 0631 / 0700
- Product in accordance to IEC 60335-1 available
- Sockets available
- Wash tight and flux proofed types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29.0 x 12.7 x 15.7) mm

CONTACT DATA

Contact arrangement	1A, 1B, 1C	2A, 2B, 2C
Contact resistance	100mΩ (at 1A 6VDC)	
Contact material	See ordering info.	
Contact rating (Res. load)	12A/16A 250VAC	8A 250VAC
Max. switching voltage	440VAC / 125VDC	
Max. switching current	12A / 16A	8A
Max. switching power	3000VA / 4000VA	2000VA
Mechanical endurance	1 x 10 ⁷ OPS	
Electrical endurance	1 x 10 ⁵ OPS (See approval reports for more details)	

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	2500VAC 1min
Surge voltage (between coil & contacts)	10kV (1.2X50μs)	
Operate time (at nomi. volt.)	15ms max.	
Release time (at nomi. volt.)	8ms max.	
Temperature rise (at nomi. volt.)	55K max.	
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance	10Hz to 150 Hz 10g/5g	
Humidity	35% to 85% RH	
Ambient temperature	-40°C to 85°C	
Termination	PCB	
Unit weight	Approx. 13.5g	
Construction	Wash tight, Flux proofed	

Notes: The data shown above are initial values.

COIL

Coil power	400mW
------------	-------

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
5	3.50	0.5	7.5	62 x (1±10%)
6	4.20	0.6	9.0	90 x (1±10%)
9	6.30	0.9	13.5	202 x (1±10%)
12	8.40	1.2	18	360 x (1±10%)
18	12.60	1.8	27	810 x (1±10%)
24	16.80	2.4	36	1440 x (1±10%)
48	33.60	4.8	72	5760 x (1±15%)
60	42.00	6.0	90	7500 x (1±15%)
110	77.00	11.0	165	25200 x (1±15%)

ELECTRICAL LIFE DATA

Configuration	Contact Rating	Minimum Operation
SPST Special code:105	Pilot duty (A300), 250VAC	250,000min. (1sec ON/9sec OFF)

Notes:

1. Test conditions: ON:30A/250VAC cosφ=0.35, OFF:3A/250VAC cosφ=0.35;at room temperature;
2. The tests were performed by Hongfa laboratory (VDE approved as TDAP laboratory).



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2008 Rev. 1.00

SAFETY APPROVAL RATINGS

VDE

Contact material	Specifications	Ratings	Ambient Temperature
AgCdO	HF115F....2(H;Z)(S)4(G)(F)	8A 250VAC	at 70°C
	HF115F....1H(S)(1;2)(G)(F)	12A 250VAC	at 70°C
		10A 250VAC	at 70°C
	HF115F....1Z(S)(1;2)(G)(F)	12A 250VAC	at 70°C
	HF115F....1H(S)3(G)(F)	16A 250VAC	at 70°C
		10A 250VAC	at 70°C
		9A 250VAC cosØ =0.4	at 70°C
	HF115F....1Z(S)3(G)(F)	16A 250VAC	at 70°C
	9A 250VAC cosØ =0.4	at 70°C	
AgNi	HF115F....2(H;Z)(S)4B(G)(F)	5A 400VAC	at 85°C
		8A 250VAC	at 85°C
	HF115F....1H(S)(1;2)B(G)(F)	12A 250VAC	at 85°C
	HF115F....1Z(S)(1;2)B(G)(F)	12A 250VAC	at 85°C
	HF115F....1H(S)3B(G)(F)	16A 250VAC	at 85°C
		12A 250VAC	at 85°C
		9A 250VAC cosØ =0.4	at 85°C
	HF115F....1Z(S)3B(G)(F)	16A 250VAC (NO only)	at 85°C
		12A 250VAC	at 85°C
		9A 250VAC cosØ =0.4 (NO only)	at 70°C
10(4)A 250VAC (NO only)		at 65°C	
12(2)A 250VAC (NO only)		at 65°C	
AgSnO ₂	HF115F....2(H;Z)(S)4A(G)(F)	8A 250VAC	at 85°C
	HF115F....1(H;Z)(S)(1;2)A(G)(F)	12A 250VAC	at 85°C
	HF115F....1H(S)3A(G)(F)	16A 250VAC	at 85°C
		9A 250VAC cosØ ==0.4	at 70°C
	HF115F....1Z(S)3B(G)(F)	16A 250VAC	at 85°C
		9A 250VAC cosØ ==0.4 (NO only)	at 70°C

UL&CUL

Version 1 or 2 (AgCdO)	12A 277VAC	Version 3 (AgSnO ₂)	16A 277 VAC
	1/2HP 250VAC		1/3HP 125VAC
	1/3HP 125VAC		1/2HP 250VAC
Version 1 or 2 (AgSnO ₂)	12A/ 277VAC	Version 3 (AgNi)	B300
	B300		R300
	R300		16A 277VAC
Version 1 or 2 (AgNi)	12A 277VAC	Version 4 (AgCdO)	5FLA, 30LRA 250VAC
	16A 277 VAC		10A 250VAC
	9A 250VAC at 105°C		8A 277VAC
Version 3 (AgCdO)	1HP 250VAC	Version 4 (AgSnO ₂)	1/2HP 250VAC
	1/2HP 125VAC		1/4HP 125VAC
	TV-5 125VAC		8A 277VAC
		Version 4 (AgNi)	8A 277VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.

ORDERING INFORMATION

Type		HF115F / 012 -1H S 1 A F (XXX)					
Coil voltage		5, 6, 9, 12, 18, 24, 48, 60, 110VDC					
Contact arrangement		1H: 1 Form A 1D: 1 Form B 1Z: 1 Form C 2H: 2 Form A 2D: 2 Form B 2Z: 2 Form C					
Construction ¹⁾		S: Wash tight Nil: Flux proofed					
Version		1: 3.5mm 1 pole 12A 2: 5.0mm 1 pole 12A 3: 5.0mm 1 pole 16A 4: 5.0mm 2 pole 8A					
Contact material		A: AgSnO ₂ B: AgNi Nil: AgCdO G: AgCdO+ Au plated AG: AgSnO ₂ + Au plated BG: AgNi+ Au plated					
Insulation standard		F: Class F Nil: Class B					
Customer special code							


Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, wash tight type is recommended; please test the relay in real applications. If the ambience allows, flux proofed is preferentially recommended.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions

3.5mm Pinning (HF115F/ □□□ -□□ -□ -1 -□□)

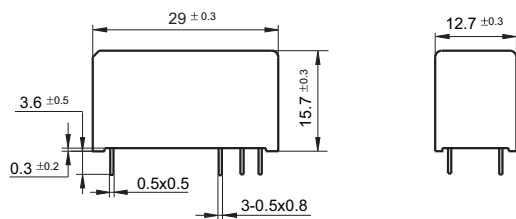

5mm Pinning (HF115F/ □□□ -□□ -□ -2/3/4 -□□)

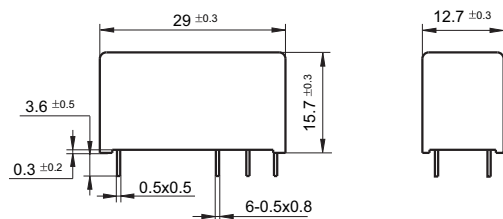


Wiring Diagram (Bottom view)

3.5/5mm Pinning, 1 Pole, 12A, HF115F/ □□□ -□□ -□ -1/2-□□



1 Form A




1 Form B



1 Form C


5mm Pinning, 1 Pole, 16A, HF115F/ □□□ -□□ -□ -3-□□



1 Form A




1 Form B




1 Form C


5mm Pinning, 2 Pole, 8A, HF115F/ □□□ -□□ -□ -4-□□



2 Form A



2 Form B




2 Form C

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

PCB Layout (Bottom view)


3.5mm 1Pole 12A




5mm 1Pole 12A

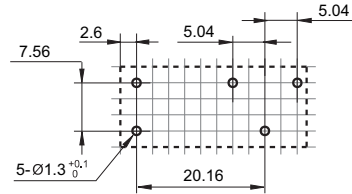

5mm 1Pole 16A

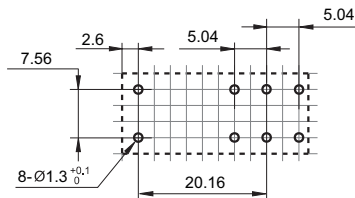


5mm 2Pole 8A

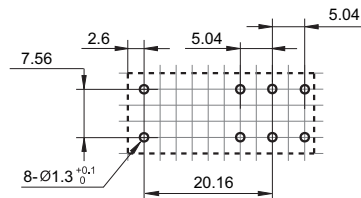


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 3) The width of the gridding is 2.52mm .

CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER (23°C)

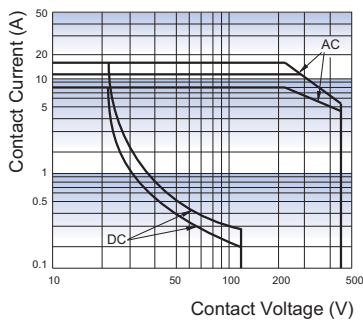

ENDURANCE CURVE

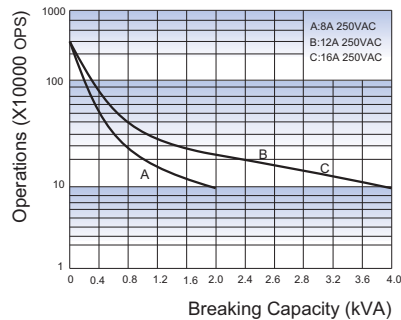

COIL OPERATING RANGE (DC)

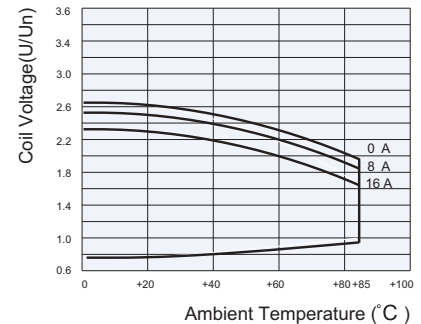

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.