


Product Description

- ◆ Low Thermal Resistance
- ◆ KTP-0 (A) Suitable for KSI / KSJ / KSIA / KSID / KSQM / KWR / KMB / KMC / KYR single phase relay
- ◆ KTP-1 Suitable for KMS / KMT / KYRT / KMTY / KSQC Three Phase Relay
- ◆ KTP-2 Suitable for KSIM Mini Single Phase Relay
- ◆ Adhesive on One Side (Optional)
- ◆ Fiberglass-reinforced & silicone-based Grease Replacement / Graphite
- ◆ RoHS Compliant



Ordering Information

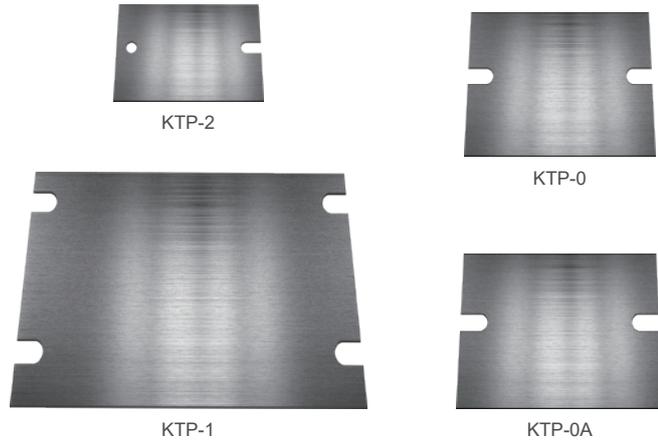

General Specifications


Color		Black
Thickness		0.15mm
Material	KTP-XA ⁽¹⁾	Fiberglass-reinforced & Silicone-based Grease Replacement
	KTP-X	Graphite
Thermal Resistance		0.1°C/W ⁽²⁾
Flame Rating		V-0
Continuous Temperature Range		-60°C ~180°C
Storage Conditions	KTP-0A	Temperature: 23~27°C Humidity: 65±20%rh
Weight (Typical)	KTP-0 (A)	0.4g
	KTP-1	0.9g
	KTP-2	0.16g

Note: (1) X Refer to 0,1,2,


(2) This value is provided for reference only. Actual application performance is directly related to the surface roughness, flatness and pressure applied.

Outline Dimensions


KTP-2

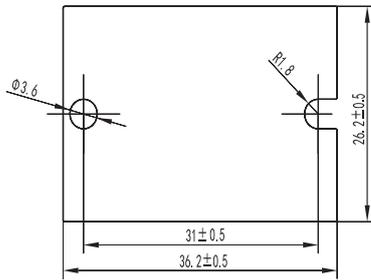

KTP-0

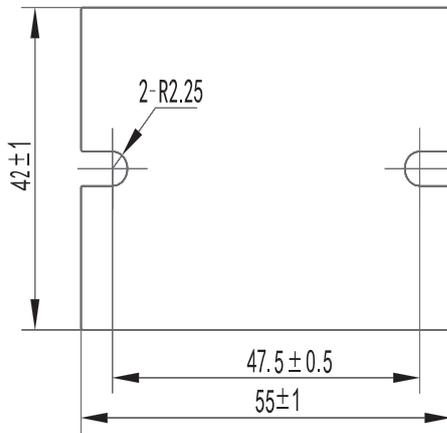

KTP-0 A

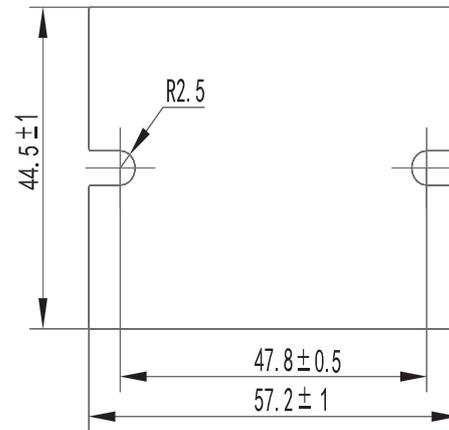

KTP-1

