

TECHNICAL DATASHEET

SCL LED PANEL LIGHT




- LED Panel light
- 24ACDC (24-26VAC/DC) or 240AC (56-265VAC)
- 3W, 4W & 8W versions
- 300Lm, 400Lm or 800LM
- 3 Lengths: 250mm, 350mm & 480mm
- PIR Sensor or Switched versions
- Day light colour temperature (6000-7000k)
- 60,000 Hour life @ 20°C
- Magnetic and Bracket mount
- Lights can be daisy chained together (up to 5)
- IP20, UKCA & CE Approved


TECHNICAL DATA

Lamp Type	LED, angle of radiation 120°
Connection	2 pole connector with snap lock
Mounting	Clip fixing (M6), Torque 2Nm max.
Housing material	Transparent Plastic
Operating temperature	-30°C to +60°C
Protection type / class	IP20 / II (double insulated)


350mm Dimensions

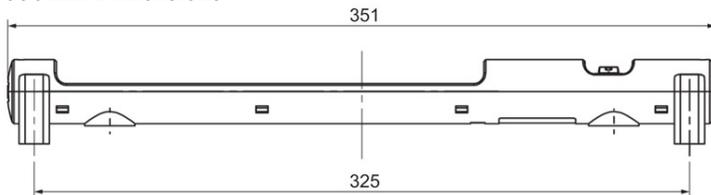

250mm Dimensions

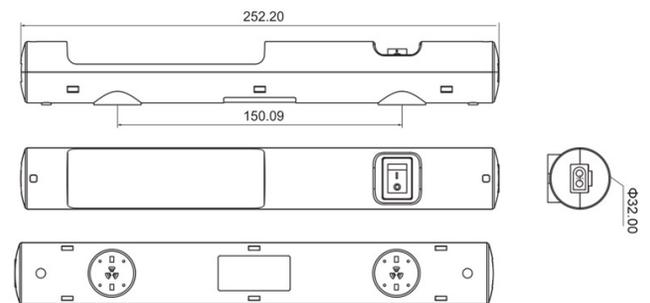

480mm Dimensions

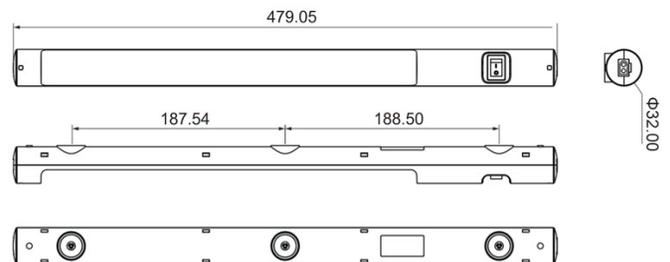

24ACDC Part No.	240AC Part No.	Operation	Length	Lumen	Power Consumption
LPL25-24ACDC-S	LPL25-240AC-S	Switch	250mm	300Lm	max. 3W
LPL25-24ACDC-P	LPL25-240AC-P	Sensor	250mm	300Lm	max. 3W
LPL35-24ACDC-S	LPL35-240AC-S	Switch	350mm	400Lm	max. 4W
LPL35-24ACDC-P	LPL35-240AC-P	Sensor	350mm	400Lm	max. 4W
LPL48-24ACDC-S	LPL48-240AC-S	Switch	480mm	800Lm	max. 8W
LPL48-24ACDC-P	LPL48-240AC-P	Sensor	480mm	800Lm	max. 8W