


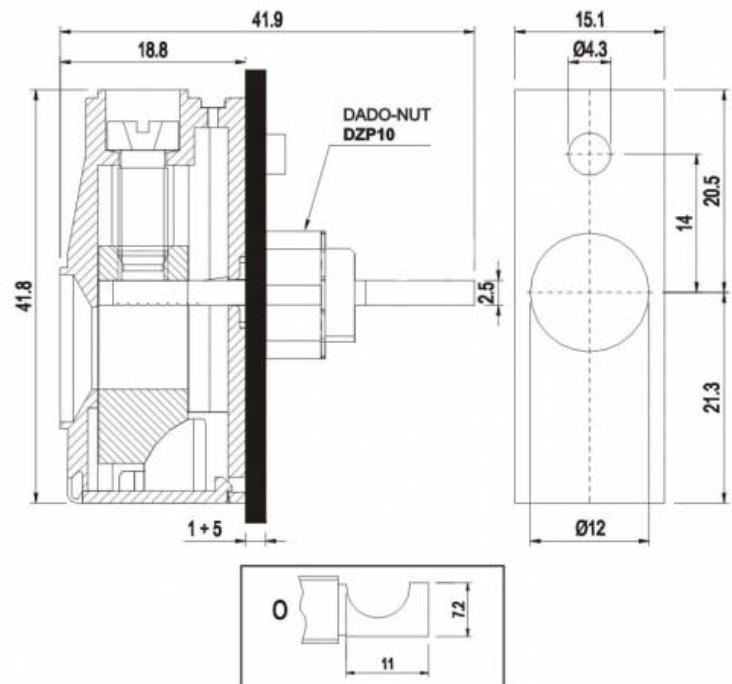

GENERAL INFORMATION

pitch:	15,1 mm
housing height:	41,80 mm
housing depth:	18.8 mm
dimensional class:	n/a
wire section:	25 mm ² / 4 AWG
clamp opening size:	
wire stripping:	max 28 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	101A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M5
max. torque:	2 Nm / 18 in.lbs

APPROVALS DATA



-



EN 60998-1



UL 1059

current:	-	101A	101A factory / 85A field
voltage:	-	750V	600V
wire section:	-	25mm ²	4÷28AWG
torque:	-	1.2Nm	18Lb-in
FILE:	-	40016489	E178356

MATERIALS

AVAILABLE COLOURS

housing:
screw:
clamp/spring:
terminal:

PA - UL 94 V0
Galvanized steel
Nicked copper alloy
Copper alloy

GN

(STD)

GY

BK

BL

RD

YL

OG

YG

other colours:
upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MPT2515-O	N/A	N/A	N/A