


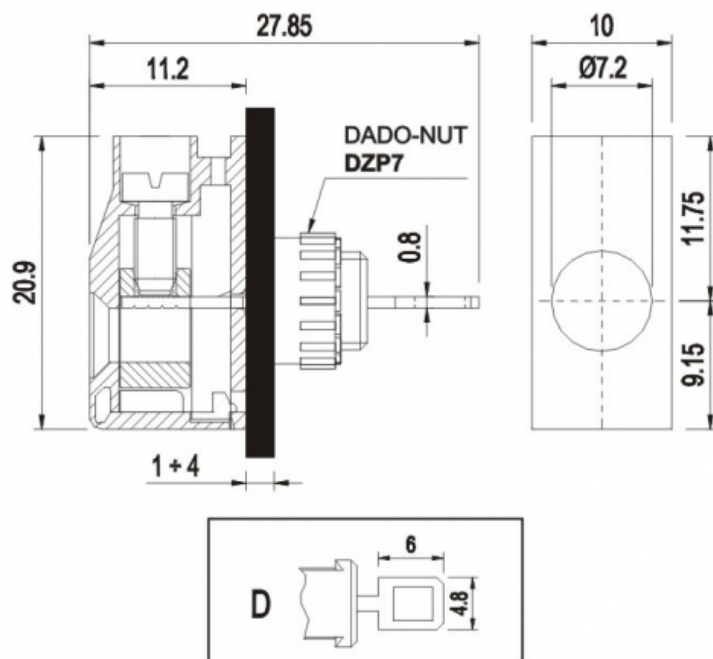

GENERAL INFORMATION

pitch:	10 mm
housing height:	20,90 mm
housing depth:	11.2 mm
dimensional class:	high
wire section:	4.0 mm ² / 12 AWG
clamp opening size:	Ø7.2 mm
wire stripping:	max 10 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	32A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



EN 60998-1

current:	32A
voltage:	450V
wire section:	4.0mm ²
torque:	0.5Nm
FILE:	CA02.00601



EN 60998-1

32A
450V
4.0mm ²
0.5Nm
40014733



UL 1059

32A factory / 20A field
600V
12÷30AWG
4.5Lb-in
E178356

MATERIALS

AVAILABLE COLOURS

housing:
screw:
clamp/spring:
terminal:

PA - UL 94 V0
Galvanized steel
Nickeled copper alloy
Tin-plated copper alloy

GN

GY

BK

BL

RD

YL

OG

YG

other colours:
upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MPT410-D	N/A	N/A	N/A