


PRODUCT DESCRIPTION:

MS1


PRODUCT CODE:



MS1H21-024

DYNAMIC 3D VIEW:



STATIC 3D VIEW:

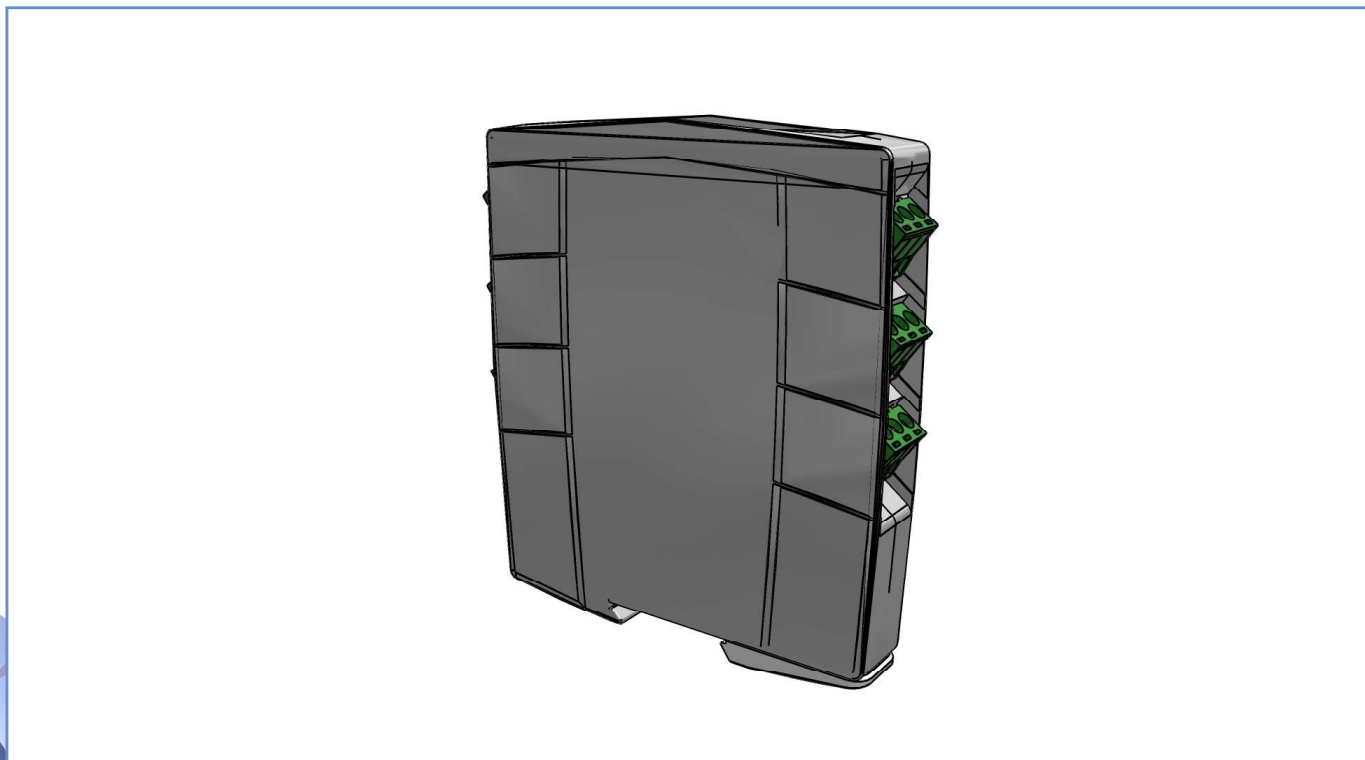

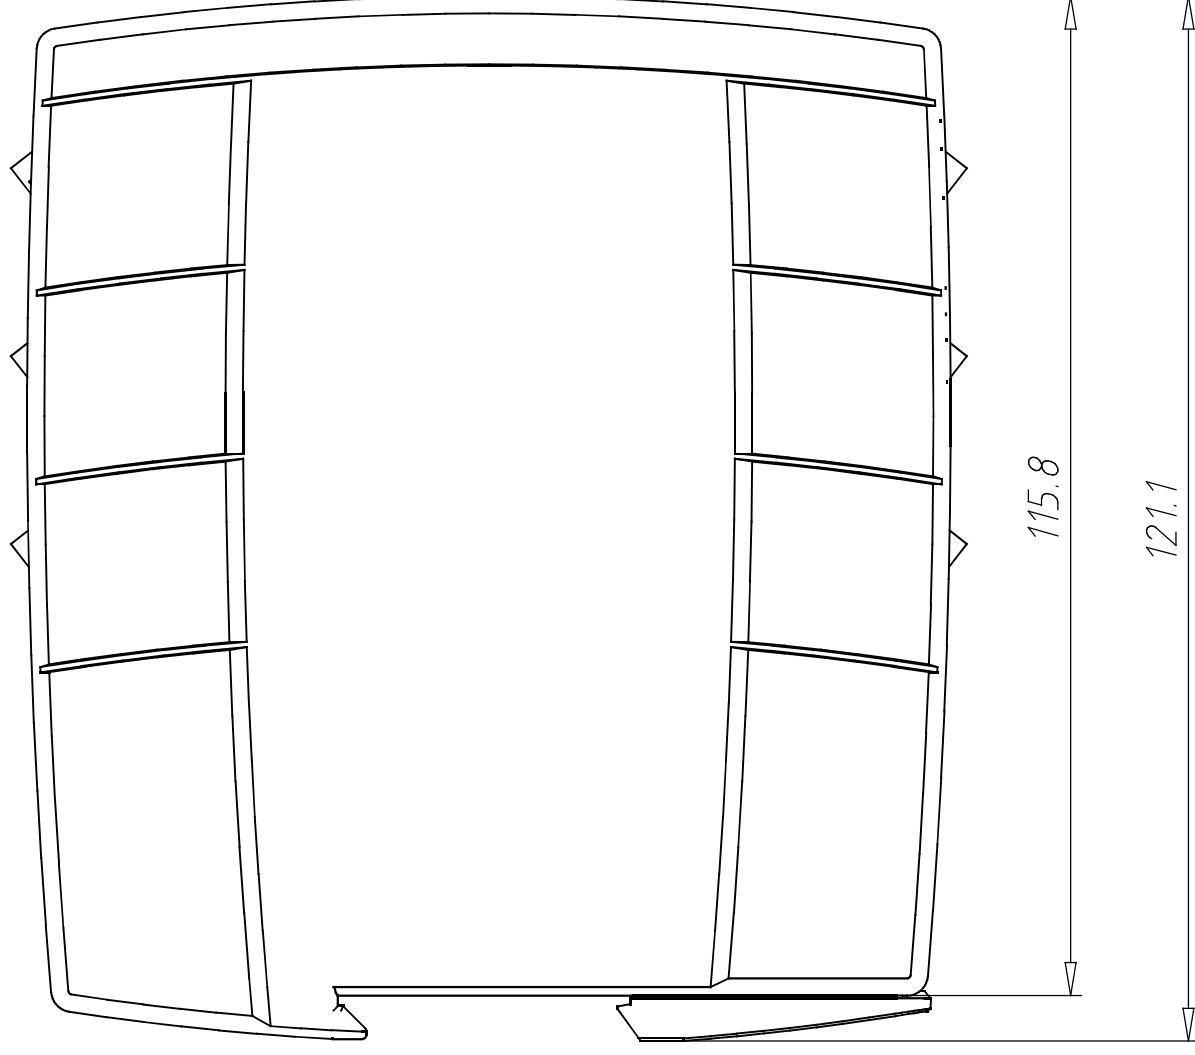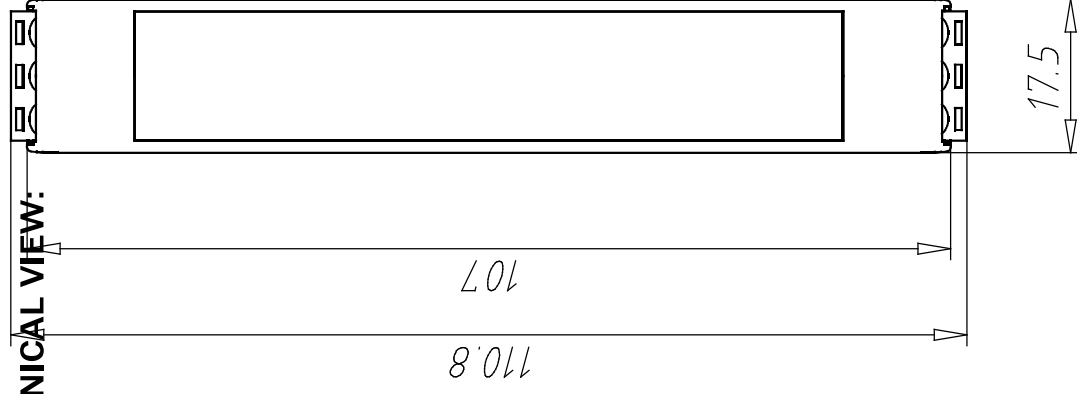TECHNICAL VIEW:

DETAILS:

Code	MS1H21-024
Casing Material	Reinforced thermoplastic
Mounting	DIN bar
weight [Kg]	0.17
Rated operating voltage [Vdc/Vac]	24
Connection thermonals	Removable screw terminals
Security channels	2
Safety exits	2 NO
Auxiliary outputs	1 NC + 1PNP
Input	2X (1NO+1NC)
Configuration type	Manual or automatic
Maximum output current [A]	6
Maximum current squared [A ²]	72
ISO 13849-1 Cat	Cat.4
ISO 13849-1 Performance Level	PL _e
Mttd [years]	422.1
Pfhd	1,35 E-10
DCavg	0.99
EN 81-20	/
EN 81-50	/
EN ISO 13849-1	Certificate
Approvals	CE, cULus
IP Degree of Protection	20
Operating Temperatures [°C]	-25 / +60
Functionality	Type IIIC bimanual control with synchronism control

PRODUCT DRAWING RELEASE:

Datasheet creation date: 06/12/2022 11:32

Last Modification (geometry): 13/08/2020 11:48


 tel. +39 039 9906408
 +39 039 9903468
 fax +39 039 9906203

 Via Novarino 9/L
 23899 Robbiate (LC)
 ITALY

 www.comepi.it
 comepi@comepi.it
 tecnico@comepi.it