
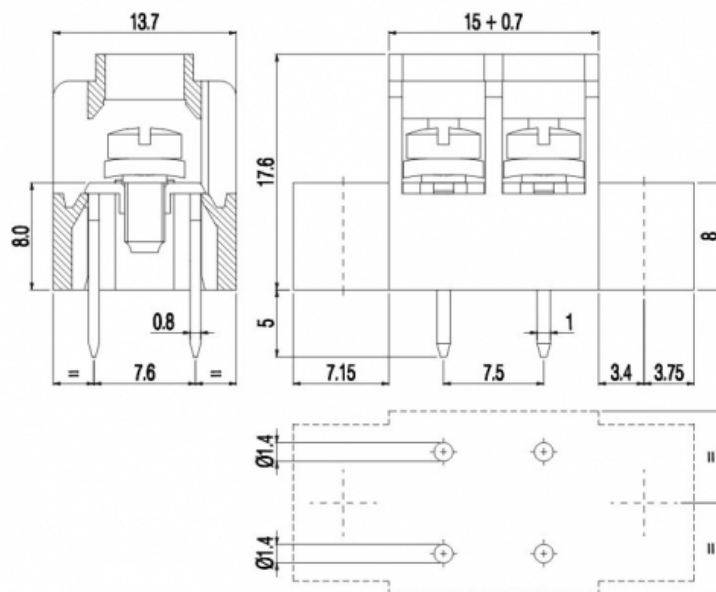


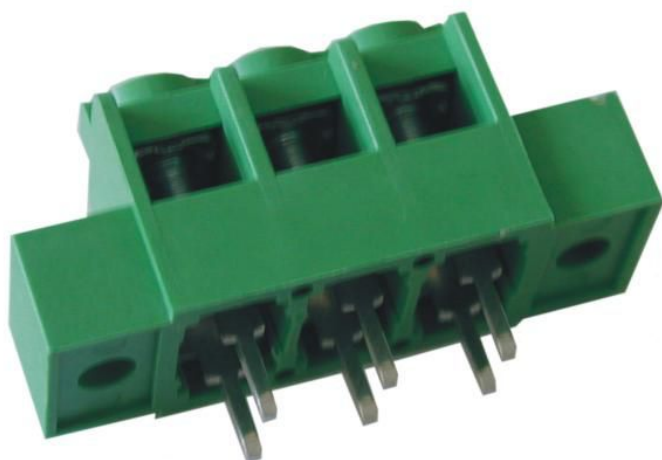

GENERAL INFORMATION

pitch:	7,5 mm
housing height:	17,60 mm
housing depth:	13.7 mm
dimensional class:	medium
wire section:	2x2.5 mm ² / 2x14 AWG
clamp opening size:	
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



current:
voltage:
wire section:
torque:
FILE:

-
-
-
-
-

-
-
-
-
-

UL 1059
20A factory / 15A field
300V
14÷30AWG
4.5Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Galvanized iron
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
-------	-----	----------	---------	---------

2	MT172-7,5-WCK	N/A	N/A	N/A
3	MT173-7,5-WCK	N/A	N/A	N/A
..	MT17..-7,5-WCK	N/A	N/A	N/A