
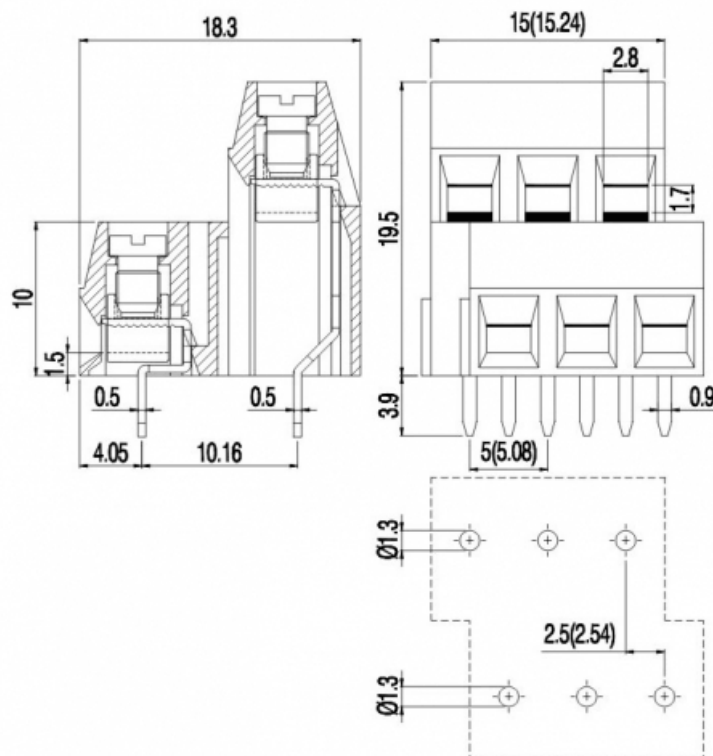


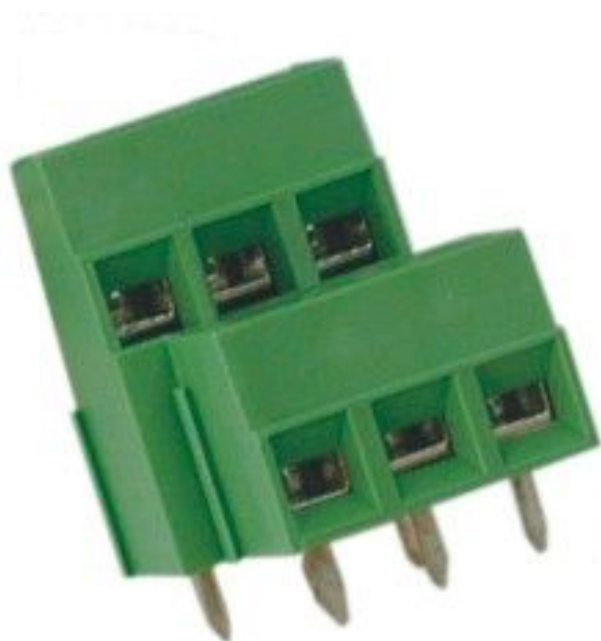

GENERAL INFORMATION

pitch:	5 mm
housing height:	19,50 mm
housing depth:	18.3 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.8 × 1.7 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	13.5A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



current:

-

-

UL 1059
13.5A factory / 10A field

voltage:

-

-

300V

wire section:

-

-

16÷30AWG

torque:

-

-

4.5Lb-in

FILE:

-

-

E178356

MATERIALS

housing:	PA - UL 94 V0
----------	---------------

AVAILABLE COLOURS

screw:
 clamp/spring:
 terminal:

Galvanized steel
 Nickeled copper alloy
 Tin-plated copper alloy



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVD152-5-V	N/A	N/A	N/A
3	MVD153-5-V	N/A	N/A	N/A
..	MVD15..-5-V	N/A	N/A	N/A