


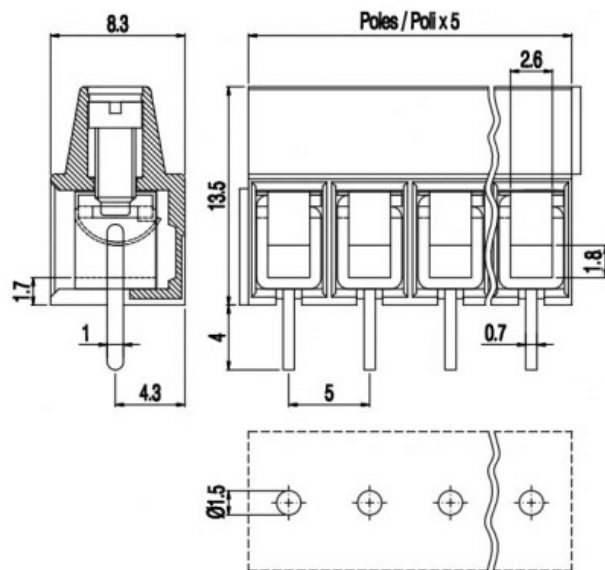

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

GENERAL INFORMATION

pitch:	5 mm
housing height:	13,50 mm
housing depth:	8.3 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.6 × 1.8 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	17.5A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2.5
max. torque:	0.4 Nm / 3.6 in.lbs

APPROVALS DATA



EN 60998-1



EN 60998-1



UL 1059

current:	17.5A
voltage:	450V
wire section:	1.5mm ²
torque:	0.4Nm
FILE:	EP151

17.5A
450V
1.5mm ²
0.4Nm
40019705

17.5A factory / 10A field
300V
16÷30AWG
3.6Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS



clamp/spring:
terminal:

Tin-plated copper alloy
Tin-plated copper alloy

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVE152-5-V	N/A	N/A	N/A
3	MVE153-5-V	N/A	N/A	N/A
4	MVE154-5-V	N/A	N/A	N/A
5	MVE155-5-V	N/A	N/A	N/A
6	MVE156-5-V	N/A	N/A	N/A
7	MVE157-5-V	N/A	N/A	N/A
8	MVE158-5-V	N/A	N/A	N/A
9	MVE159-5-V	N/A	N/A	N/A
10	MVE1510-5-V	N/A	N/A	N/A
11	MVE1511-5-V	N/A	N/A	N/A
12	MVE1512-5-V	N/A	N/A	N/A
..	MVE15..-5-V	N/A	N/A	N/A