

CONTROL COMPONENTS

PB SERIES 22.5mm FLUSH STYLE PUSHBUTTONS WITH METAL BEZEL

- UL, CSA, TUV, CCC & CE approved
- IP65 22.5mm panel mount
- Quick fit contacts, easy to install
- Supplied complete with contacts fitted
- Quick release contact coupling
- Colour coded contacts for quick and easy identification when wiring
- Maximum number of contacts per unit 8




Specification

Contact Rating	10 Amp 24VACDC	Insulation resistance	100M Ohm (500VDC)
	6 Amp 230VAC	Maximum humidity	85%
Initial Contact resistance	50m Ohm max	Dielectric strength	2500VAC/ 1min
Mechanical life	3,000,000 ops	Vibration resistance	10-2000Hz
Ambient temperature	-20 to +60°C	LED Life	50,000 Hours
Ingress protection	IP65	Cable Terminal Size	1.25mm ²

Description	LED Illuminated Push Buttons			
	Non Illuminated	24VAC/DC	110VAC	230VAC
Red Pushbutton with 1NC contact	PB22BFRM-1B	PB22IF7RLM-1B	PB22IF1RLM-1B	PB22IF2RLM-1B
Green Pushbutton with 1NO contact	PB22BFGM-1A	PB22IF7GLM-1A	PB22IF1GLM-1A	PB22IF2GLM-1A
Yellow Pushbutton with 1NO contact	PB22BFYM-1A	PB22IF7YLM-1A	PB22IF1YLM-1A	PB22IF2YLM-1A
Blue Pushbutton with 1NO contact	PB22BFBLM-1A	PB22IF7BLM-1A	PB22IF1BLM-1A	PB22IF2BLM-1A
White Pushbutton with 1NO contact	PB22BFWM-1A	PB22IF7WLM-1A	PB22IF1WLM-1A	PB22IF2WLM-1A
Black Pushbutton with 1NO contact	PB22BFBM-1A			

* Other voltages available upon request

Dimensional Drawings

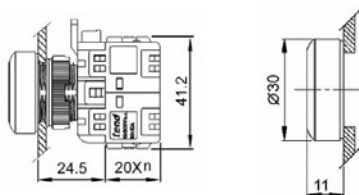

PB22 Series Push Button



Illuminated PB22 Series Push Button