

CONTROL COMPONENTS

PB SERIES 22.5mm KEY SWITCHES

- UL, CSA, TUV, CCC & CE approved
- IP65 22.5mm panel mount
- Quick fit contacts, easy to install
- Supplied complete with contacts fitted
- Quick release contact coupling
- Colour coded contacts for quick and easy identification when wiring
- Maximum number of contacts per unit 8
- Metal bezel available
- Supplied with 2 Keys




Specification

Contact Rating	10 Amp 24VACDC	Insulation resistance	100M Ohm (500VDC)
	6 Amp 230VAC	Maximum humidity	85%
Initial Contact resistance	50m Ohm max	Dielectric strength	2500VAC/ 1min
Mechanical life	3,000,000 ops	Vibration resistance	10-2000Hz
Ambient temperature	-20 to +60°C	Cable Terminal Size	1.25mm ²
Ingress protection	IP65		

Description	Position	Order Code
90° 2 Position latching with 1NO contact Key removal 0 & 1	✓	PB22KS21-1A
90° 2 Position latching with 1NO contact Key removal 0	✓	PB22KS22-1A
90° 2 Position latching with 1NO contact Key removal 1	✓	PB22KS23-1A
90° 2 Position Spring Return with 1NO contact Key removal 0	✓	PB22KS32-1A
45° 3 Position latching with 2NO contacts Key removal 1, 0 & 2	✓	PB22KS44-1AA
45° 3 Position latching with 2NO contacts Key removal 0	✓	PB22KS45-1AA
45° 3 Position Right Spring Return with 2NO contacts Key removal 0	✓	PB22KS55-1AA
45° 3 Position Left Spring Return with 2NO contacts Key removal 0	✓	PB22KS65-1AA
45° 3 Position Spring Return with 2NO contacts Key removal 0	✓	PB22KS75-1AA

Other versions available upon request

Dimensional Drawings

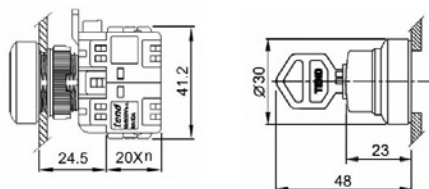

PB22KS Series Push Button