


Coaxial Protectors - Quarter-Wave

PRC2400




PRC2400-NW/MF

- **Surge Protective Device for Ultra High Frequency Transmissions**
- **Series Installed Quarter-Wave Technology**
- **Maintenance Free Design**
- **50kA Protection at 8/20μs**
- **Imp 10/350μs Withstand**
- **Low Insertion Loss**
- **VSWR < 1.2**
- **UL497E Listed**

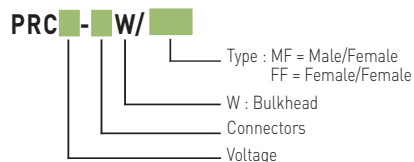

Dimensions

(in mm)

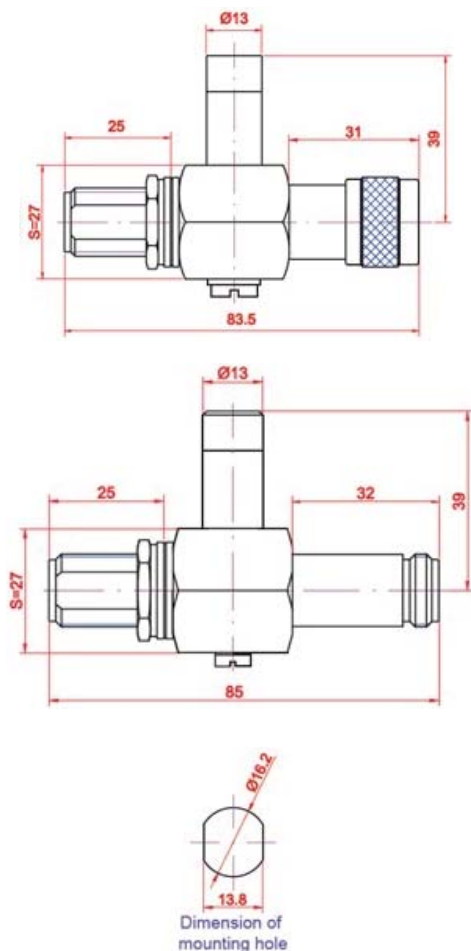

Characteristics

CITEL Part Number	PRC2400-NW/FF	PRC2400-NW/MF
Maximum Power	1,500 W	1,500 W
Insertion Loss	< 0.15 dB	< 0.15 dB
I _{peak} (8/20μs)	50 kA	50 kA
I _{imp} (10/350μs)	20 kA	20 kA
VSWR (at all frequencies)	< 1.2	< 1.2
Impedance	50 Ohms	50 Ohms
Frequency Range	2.3-2.5 GHz	2.3-2.5 GHz
Mechanical		
Relative Humidity	0 to 100% Condensing	
Operating Temperature	-40°C to +85°C	
Operating Altitude	13,000 ft	
Connection	N-Type	
Earthing	M8 grounding lug	
Dimensions	See Drawing	
Standard Compliance	UL497E	

Material

Component	Body	Male Contacts	Female Contacts
Housing Material	Brass	Bronze	Bronze