


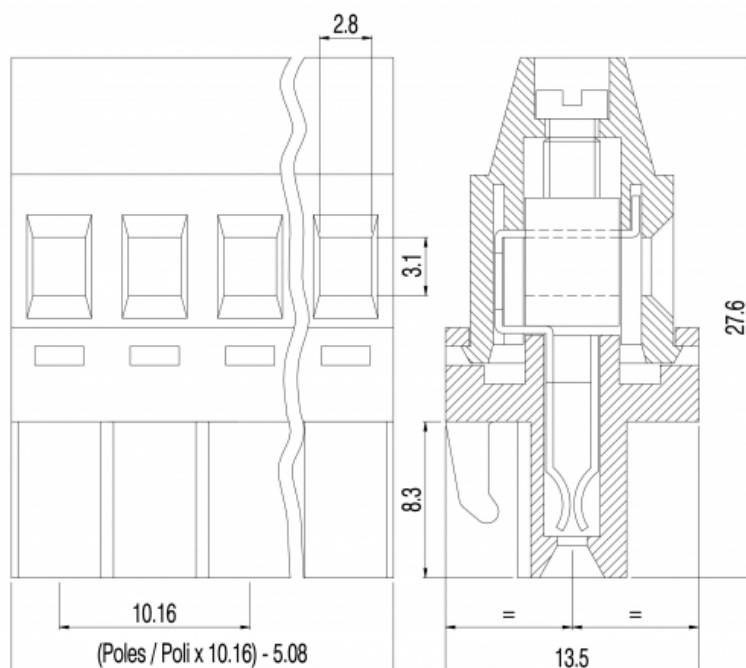

GENERAL INFORMATION

pitch:	10,16 mm
housing height:	27,60 mm
housing depth:	13.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 3.1 mm
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	15A
voltage:	500V
impulse voltage:	6 kV

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



EN 61984

current:	15A
voltage:	500V
wire section:	2.5mm ²
torque:	0.5Nm
FILE:	CA02.04178



EN 61984

15A
500V
2.5mm ²
0.5Nm
40005779



UL 1059

12A factory / 12A field
600V
14÷30AWG
4.5Lb-in
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickel copper alloy

AVAILABLE COLOURS



other colours: upon request

terminal:

Nickeled copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	SV02-10,16-P	N/A	N/A	N/A
03	SV03-10,16-P	N/A	N/A	N/A
04	SV04-10,16-P	N/A	N/A	N/A
05	SV05-10,16-P	N/A	N/A	N/A
06	SV06-10,16-P	N/A	N/A	N/A
07	SV07-10,16-P	N/A	N/A	N/A
08	SV08-10,16-P	N/A	N/A	N/A
09	SV09-10,16-P	N/A	N/A	N/A
10	SV10-10,16-P	N/A	N/A	N/A
11	SV11-10,16-P	N/A	N/A	N/A
12	SV12-10,16-P	N/A	N/A	N/A