

SWITCHGEAR

TD ENCLOSED SWITCH DISCONNECTORS 3 & 4 POLE

- 16 to 80 Amp
- AC21 Ratings
- IP65 Weatherproof Enclosure
- Padlockable in the Off Position
- Door Interlocked Handle
- CE and TUV Approved
- Earth and Neutral Terminals Included
- 16 - 40 Amp, 6 x M20 Knockouts
- 63 - 80 Amp, 6 x M25 Knockouts



6 Pole Enclosed Switch Disconnecter with Red & Yellow Handle

Amps	Size	Part Code	Auxillary Contact 1NO	Auxillary Contact 2NO
16	I	TD616	**	*
25	I	TD625	**	*
32	I	TD632	**	*
40	I	TD640	**	*
63	J	TD663	**	*
80	J	TD680	**	*

8 Pole Enclosed Switch Disconnecter with Red & Yellow Handle

Amps	Size	Part Code	Auxillary Contact 1NO	Auxillary Contact 2NO
16	J	TD816	*	*
25	J	TD825	*	*
32	J	TD832	*	*
40	J	TD840	*	*
63	J	TD863	*	*
80	J	TD880	*	*

* Unavailable due to enclosure size.

** An additional Auxillary can be added, please contact the sales department for further details.

Please see page 103 for dimensions


SWITCHGEAR

TD / TDS SWITCH DISCONNECTORS TECHNICAL INFORMATION


According to IEC 60947-3

Size	16	25	32	40	63	80
AC Rated Operational current						
AC 21	16A	25A	33A	40A	66A	80A
AC 23						
220V - 240V	3 Kw	5.5 Kw	5.5 Kw	7.5 Kw	11 Kw	18.5 Kw
380V - 440V	5.5 Kw	7.5 Kw	11.5 Kw	15 Kw	22 Kw	30 Kw
660V - 690V	5.5 Kw	7.5 Kw	11.5 Kw	18.5 Kw	30 Kw	37 Kw
AC 3						
220V - 240V	2.2 Kw	4 Kw	5.5 Kw	7.5 Kw	11 Kw	15 Kw
380V - 440V	3.7 Kw	5.5 Kw	7.5 Kw	11 Kw	18.5 Kw	22 Kw
660V - 690V	3.7 Kw	5.5 Kw	7.5 Kw	15 Kw	22 Kw	30 Kw
AC 3						
110V - 120V	1	1.5	2	3	5	7.5
220V - 240V	2	3	5	7.5	10	20
380V - 440V	3	5	10	15	20	40
500V - 600V	3	5	10	15	20	50
Cable Capacity 3 Pole	1-8mm	1-8mm	1-8mm	1-8mm	2-16mm	2-16mm
Cable Capacity 4 Pole	1.5-13mm	1.5-13mm	1.5-13mm	1.5-13mm	2-16mm	2-16mm
Ambient Temperature						
Storage Co	-30 + 70					
Operation Co	-25 + 55					

Mounting Plate

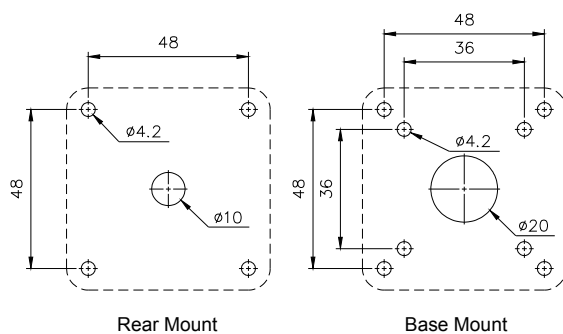

Wiring Diagram



Approvals

