


TECHNICAL DATASHEET

SCL THERMAL OVERLOAD RELAYS



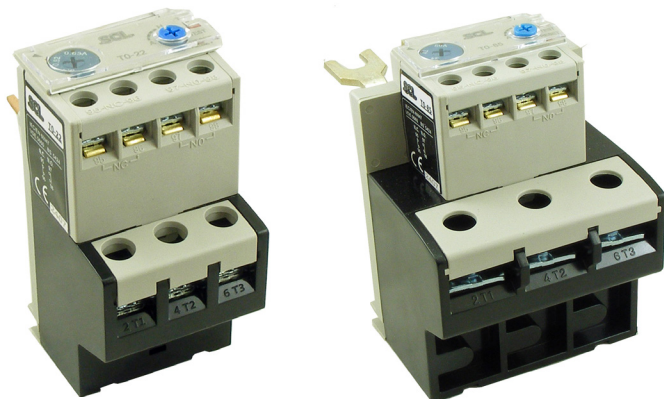


- TO-22 for: C09-C22 Contactors
12, 18 & 22 Amp DOL
- TO-40 for: C32-C40 Contactors
32 Amp DOL
- TO-85 for: C65-C85 Contactors
- 1 NO + 1 NC Auxiliary Contact
- Manual and Auto reset
- Class 10A Trip characteristics
- Selectable reset range
- IP20
- IEC60947-4, UL-508 Compliant
- -5 to +40°C Operating temperature




Part Number	Overload Current Rating
TO-22-0.16	0.1-0.16 Amp
TO-22-0.25	0.16-0.25 Amp
TO-22-0.4	0.25-0.4 Amp
TO-22-0.63	0.4-0.63 Amp
TO-22-1	0.63-1 Amp
TO-22-1.6	1-1.6 Amp
TO-22-2.5	1.6-2.5 Amp
TO-22-4	2.5-4 Amp
TO-22-6	4-6 Amp
TO-22-8	5-8 Amp
TO-22-9	6-9 Amp

Part Number	Overload Current Rating
TO-22-10	7-10 Amp
TO-22-13	9-13 Amp
TO-22-18	12-18 Amp
TO-22-22	16-22 Amp
TO-40-26	18-26 Amp
TO-40-36	24-36 Amp
TO-40-40	28-40 Amp
TO-85-50	34-50 Amp
TO-85-65	45-65 Amp
TO-85-75	54-75 Amp
TO-85-85	63-85 Amp

TO-22 Dimensions

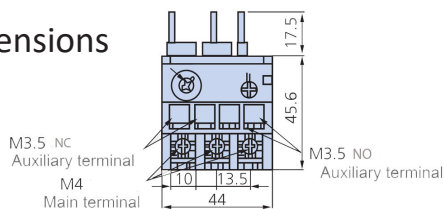

TO-40 Dimensions

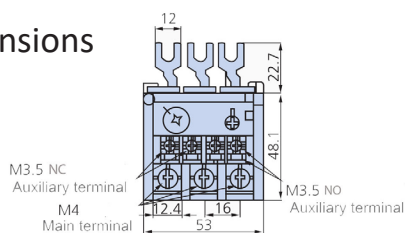

TO-85 Dimension

