
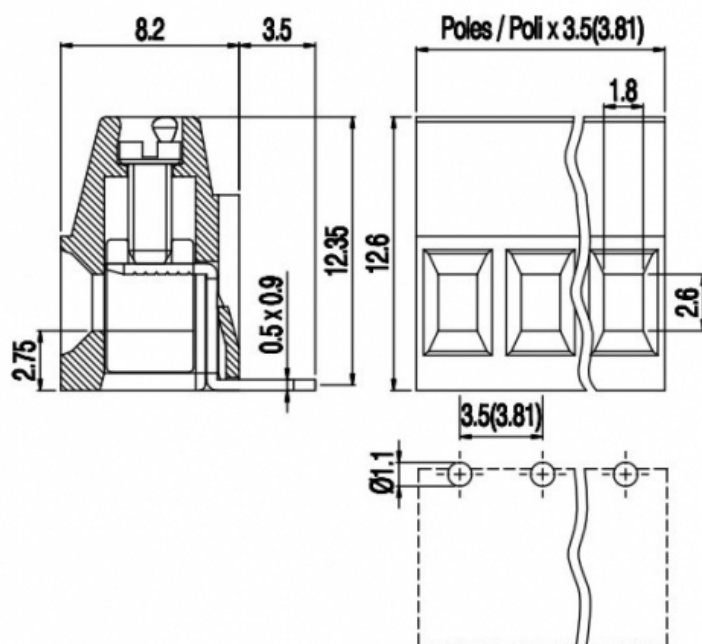


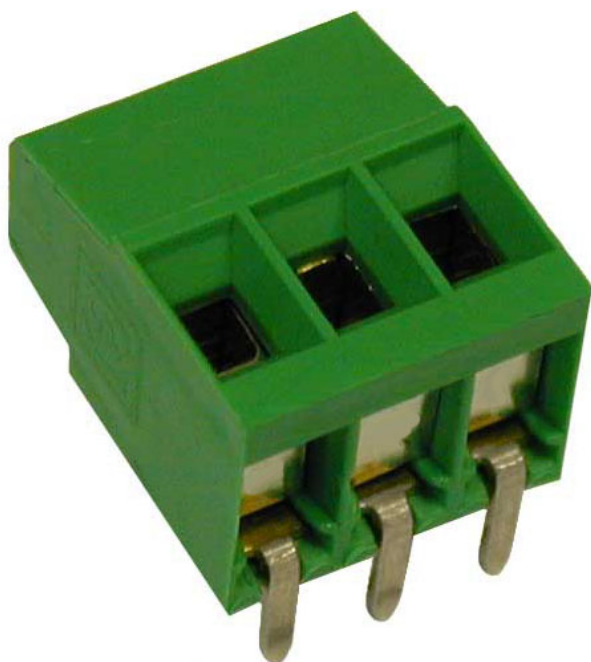

## GENERAL INFORMATION

|                        |                              |
|------------------------|------------------------------|
| pitch:                 | 3,5 mm                       |
| housing height:        | 12,60 mm                     |
| housing depth:         | 8.2 mm                       |
| dimensional class:     | slow                         |
| wire section:          | 1.5 mm <sup>2</sup> / 16 AWG |
| clamp opening size:    | 1.8 × 2.6 mm                 |
| wire stripping:        | max 6 mm                     |
| operating temperature: | -40°C ÷ +130°C               |

## ELECTRICAL CHARACTERISTICS

|               |                |
|---------------|----------------|
| current:      | 13,5A          |
| voltage:      | 130V           |
| test voltage: | 1.25 kVrms/60s |

## MECHANICAL CHARACTERISTICS

|              |                     |
|--------------|---------------------|
| screw:       | M2                  |
| max. torque: | 0.2 Nm / 1.8 in.lbs |

## APPROVALS DATA



EN 60998-1

|               |                    |
|---------------|--------------------|
| current:      | 13.5A              |
| voltage:      | 130V               |
| wire section: | 1.0mm <sup>2</sup> |
| torque:       | 0.2Nm              |
| FILE:         | CA02.04718         |



-  
-  
-  
-  
-



|                         |
|-------------------------|
| UL 1059                 |
| 12A factory / 10A field |
| 150V                    |
| 16÷30AWG                |
| 1.8Lb-in                |
| E178356                 |

## MATERIALS

|               |                         |
|---------------|-------------------------|
| housing:      | PA - UL 94 V0           |
| screw:        | Galvanized steel        |
| clamp/spring: | Tin-plated copper alloy |
| terminal:     | Tin-plated copper alloy |

## AVAILABLE COLOURS



other colours: upon request

| poles | P/N             | pcs/pack | W [Kg]* | W [Kg]* |
|-------|-----------------|----------|---------|---------|
| 2     | MVS132-3,5-H-L  | N/A      | N/A     | N/A     |
| 3     | MVS133-3,5-H-L  | N/A      | N/A     | N/A     |
| 4     | MVS134-3,5-H-L  | N/A      | N/A     | N/A     |
| 5     | MVS135-3,5-H-L  | N/A      | N/A     | N/A     |
| 6     | MVS136-3,5-H-L  | N/A      | N/A     | N/A     |
| 7     | MVS137-3,5-H-L  | N/A      | N/A     | N/A     |
| 8     | MVS138-3,5-H-L  | N/A      | N/A     | N/A     |
| 9     | MVS139-3,5-H-L  | N/A      | N/A     | N/A     |
| 10    | MVS1310-3,5-H-L | N/A      | N/A     | N/A     |
| 11    | MVS1311-3,5-H-L | N/A      | N/A     | N/A     |
| 12    | MVS1312-3,5-H-L | N/A      | N/A     | N/A     |