


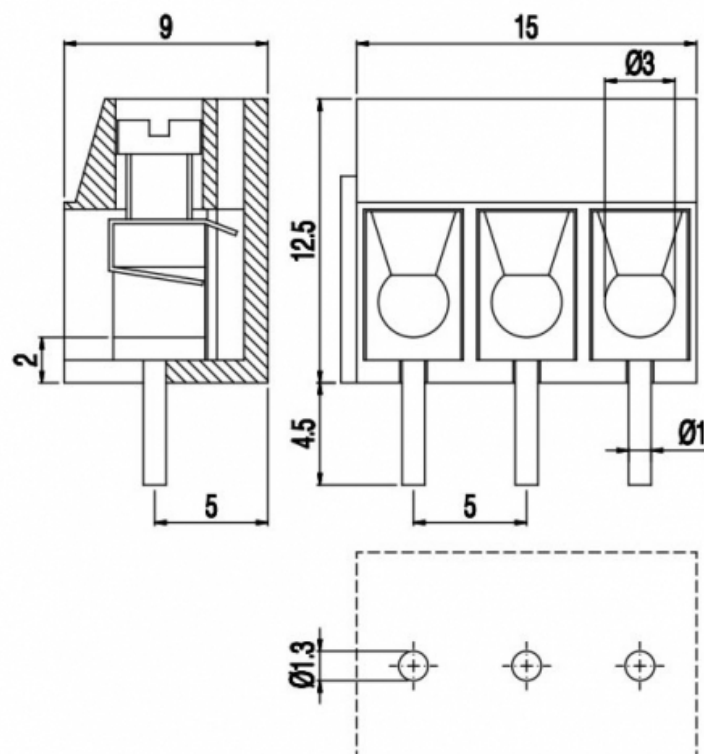

GENERAL INFORMATION

pitch:	5 mm
housing height:	12,50 mm
housing depth:	9 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	3 × 3 mm
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +105°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA



current:
voltage:
FILE:

-
-
-

-
-
-

-
-
-

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickeled copper alloy
terminal:	Copper alloy

AVAILABLE COLOURS

BK

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVE162-5-V	N/A	N/A	N/A
3	MVE163-5-V	N/A	N/A	N/A
..	MVE16..-5-V	N/A	N/A	N/A